


LIGHTING

catalogue 2025



DISCOVER **SMART DESIGN** STYLE

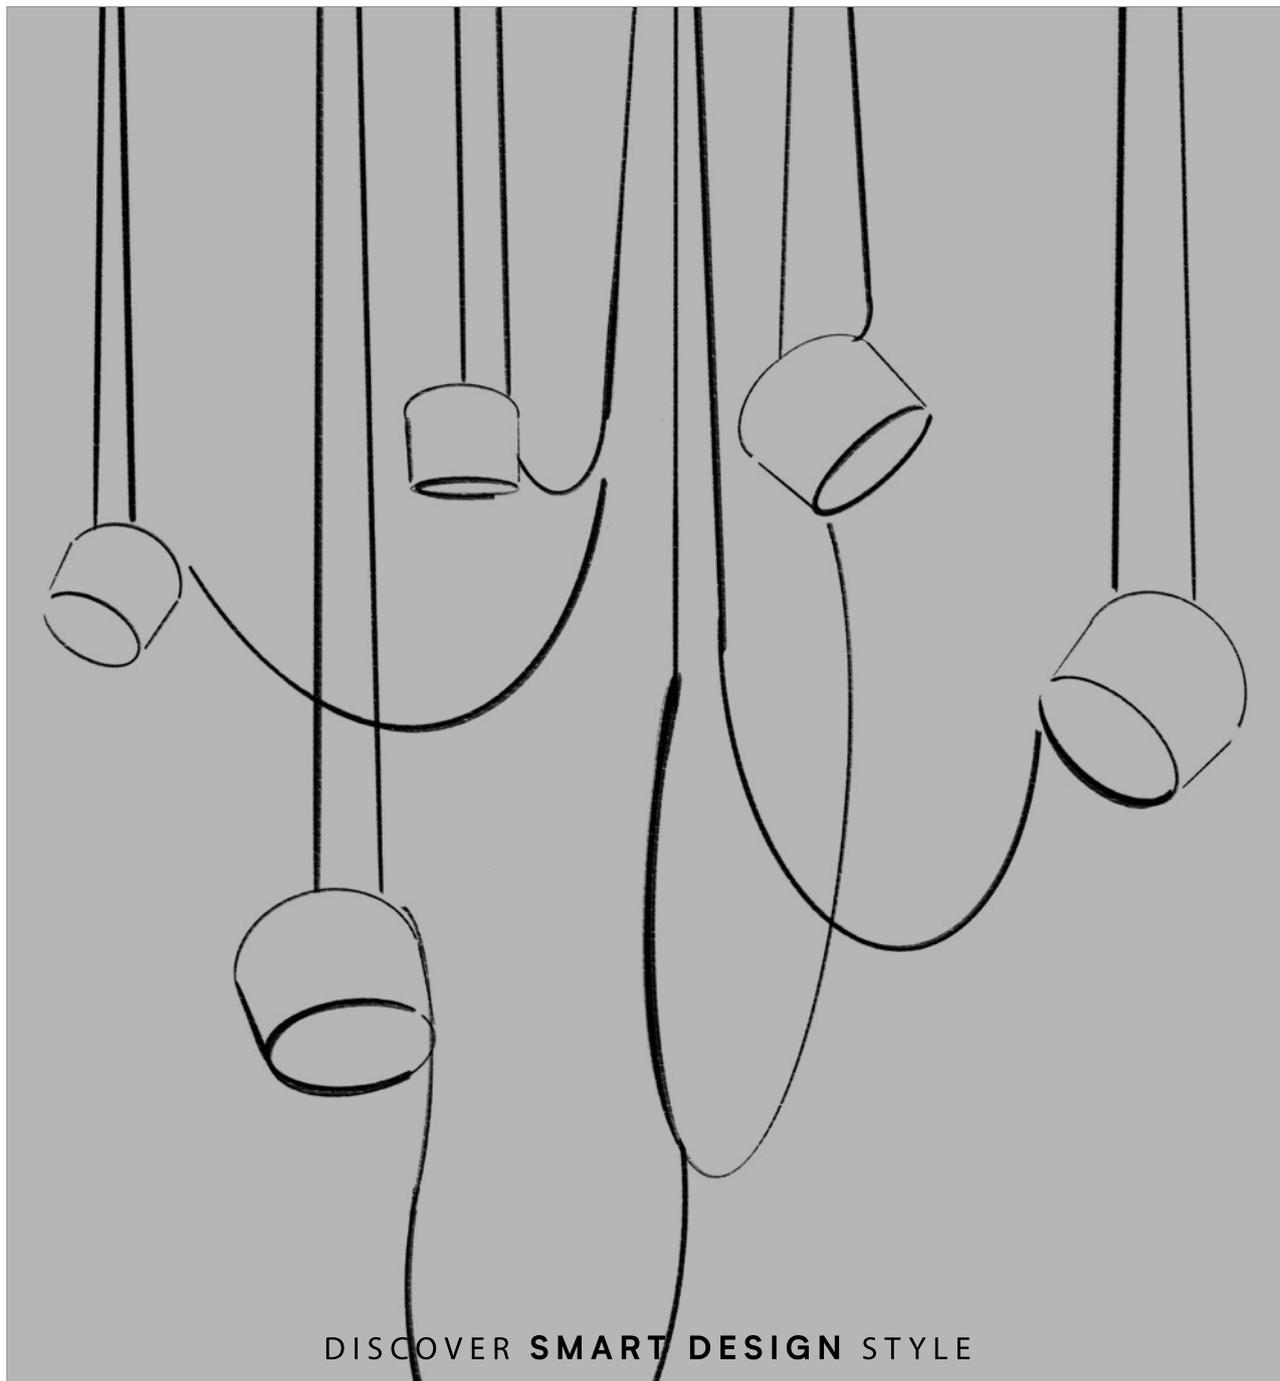

SMART
DESIGN
EXPO

INDEX

1 _ GENERAL LIGHTING

APOLLO LED
P. 12



PAR LED COMPACT
P. 19



APOLLO MH 70W
P. 12



PAR LED CAMEO
P. 21



EOS LED
P. 14



PAR LED COB 250W
P. 23



KRONOS
P. 14



**BLACK LED LAMP V-TAC
6500K**
P. 25



AQFORM HYPER
P. 16



**BLACK LED LAMP V-TAC
4000K**
P. 25



ZUMA LINE
P. 16



**BLACK LED LAMP V-TAC
V-TAC
6500K - 300W** P. 26



BOLONIA
P. 17



**ELATION KL FRESNEL
STR.** 27



KANLUX MH 400W
P. 17-18



**FLOOR LAMP
KANLUX BERG DL-350**
P. 29



PAR 575
P. 19



WATER EFFECT LIGHT
P. 29



INDEX

2 _ DOWNLIGHT

HQI 35W
P. 31



HQI 150 W
P. 31



LED CEILING LIGHT FITTINGS 6W
P. 33



LED CEILING LIGHT FITTINGS
12 P. 33



LED CEILING LIGHT FITTINGS 15W
P. 34



BENQ LED CEILING LIGHT FITTINGS
P. 34



LED CEILING LIGHT FITTINGS
12W6000-6500 P. 35



KOBI OH 36
P. 36



KOBI OH 42 DOUBLE / TRIPPLE
P. 36



DOWNLIGHT COB 10W
SUPER LED
P. 37

color temperature- cold / neutral /



LED CEILING FIXTURE 10W
P. 39

color temperature - cold



LED CEILING FIXTURE 12W
P. 39

color temperature - cold



OPRAWA SUFITOWA LED 15W
P. 40

color temperature - cold



OPRAWA SUFITOWA COB 7W
P. 40

color temperature - cold



CEILING LIGHT FI60
P. 41



LED CEILING LIGHT BIANCO
8W/4000K
P. 41



ROLI TUBE 15 W
P. 42



INDEX

3 _ ARMS

JEWELLERY ARM LED LIGHT
30 CM
P. 44



JEWELLERY ARM LED LIGHT
22 CM
P. 44



HALOGEN ARM LIGHT ELSTAR
P. 45



LED ARM LIGHT
STR. 45



LED ARM LIGHT
STR. 46



4 _ WALL LAMPS

ANTIKA BLACK
P. 48



LOFT
P. 49



REALITY
P. 50



4 _ WALL LAMPS

BROLO
P. 50



LILHOLMEN
P. 51



INSPIRE
P. 51



NYMANE
STR. 52



JUPITER IGONE E-14
P. 52



NYMANE GU-10
P. 54



KAVE HOME
P. 54



INTIS
P. 56




STARLING
P. 56




INDEX

4 _ WALL LAMPS

ZERO
P. 58



RISERVA
P. 58




5 _ DECORATIVE LAMPS

EGLO RONDO
P. 60



FREDIKA
P. 60



SOLLUX UGO
P. 62



LEMIR
P. 62



BALL
P. 63




MODERN
P. 63




5 _ DECORATIVE LAMPS

PASTELO 1X40W
P. 64



TUBA G9
P. 64



EYE
P. 66



GRAPHITE
P. 66



TUBO 4 BLACK
P. 67



SOLLUX
P. 68



TUBA GU - 10
P. 68



ALFA BOLT
P. 69



BUBLIK
P. 69



INDEX

5 _ DECORATIVE LAMPS

TAMEN INSPIRE
P. 70



ŻYRANDOL
P. 77



GAUCHO
P. 70



INSPIRE
P. 78



RETRO
P. 72



TARBES
P. 78



LED BREDA
P. 72



KAJA
P. 79



ARABICA
P. 73



KOPENHAGEN LOFT
P. 79



PORTORYKO
P. 73



OPRAWA GWINT
P. 81



CARUBA
P. 75



RAKIJA
P. 83



SPIDER
P. 75



FLOS AIM
P. 83



GRINDFALLET
P. 77



BAS
P. 84




INDEX

5 _ DECORATIVE LAMPS


NORDLUX-BALANCE
P. 84



LONG CHROM
P. 86



PURE 2 BLACK
P. 88



SORENTO
P. 88



EDO
P. 89



ARGON ERBA
P. 89



ITALUX SARH
P. 90



AXEL AZARDO
P. 90



ZENITH
P. 91



HERMINA
P. 91



ALUMINIUM
P. 92



HEKTAR
P. 92



NYMANE W
P. 93



PS 2014 3D
P. 93



RANARP
P. 94



MITRILA
P. 94



NORDLUX
P. 95



FELSISK
P. 95



INDEX

5 _ DECORATIVE LAMPS

SKYMINGEN
P. 96



SINNERLIG
P. 96



LIGHTING
P. 97



LUMINEX
P. 97



6 _ DECORATIVE STANDING

UPSTREET
P. 99



INDUSTRIAL DESIGN
P. 99



VIDJA
P. 100



LAUTERS
P. 101



EGLO
P. 101



ALANG
P. 102



ENEGLAND
P. 102



ARSTRID
P. 103



NIUANCE
P. 103



INDEX

6 _ DECORATIVE STANDING

NYFORS
P. 104



PS 2014
P. 104



RANARP M
P. 105



SKURUP
P. 105



SVIRVEL
P. 106



LERSTA
P. 107



WOORDROW
P. 108



NAVARRA
P. 108



HEKTAR
P. 109



YPPERLIG
P. 110



LOFT APP
P. 110



**ALDEX X2 / ALDEX
INCANA P. 111**



ALDEX X1
P. 112



ALDEX PURE
P. 113



TVÄRHAND
P. 113



LAMPAN
P. 114



CUMULUS
P. 114




INDEX

7 _ GARLANDS


GARDEN
P. 116



SVARTRA
P. 116



STRING
P. 117



8 _ LIGHTBOX

LED PANELS
P. 119



EDGE LIGHTING
P. 120




9 _ TYPES OF HIGHLIGHTS


BOX LOGO WITH
ILLUMINATED FRONT
P. 122




3D LOGO WITH ILLUMINATION
FROM THE SIDE OF EACH
ELEMENT
P.123




3D LOGO MADE OF THICK
PLEXIGLASS, ILLUMINATED
FROM THE FRONT AND SIDE
P. 124




3D LOGO WITH HALO EFFECT
STR. 125




2D LOGO, MILLED IN THE BOARD,
WITH ILLUMINATED FRONT
P. 126



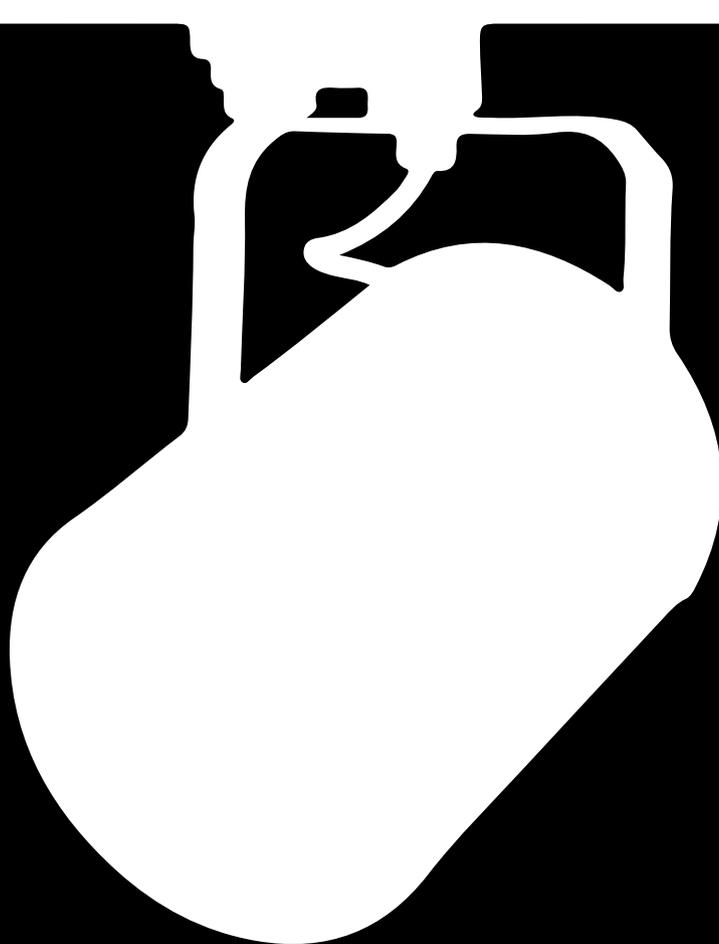

1_ GENERAL LIGHTING




a: ø 145 mm
b: 190 mm
c: 170 mm

APOLLO LED

+ info

quantity	42
reordering option	yes
wattage [W]	37
luminous flux [Lm]	4900
color temperature [K]	4000
base	LED COB
beam angle [°]	24
weight [kg]	2,3
optimal instalation height [m]	3-4
max instalation height[m]	5
min instalation height[m]	3
heat output	low
cable length [m]	bus duct
material	aluminium
color	black



a: ø 145 mm
b: 190 mm
c: 170 mm

APOLLO MH 70W


+ info

quantity	angle: 12, black: 37 angle: 24, black: 53 angle: 12, white: 4 angle: 24, white: 115 angle: 38, white: 20
reordering option	no
wattage [W]	70
luminous flux [Lm]	6300
color temperature [K]	3000 - 4200
base	G12
angle [°]	12 - 38
weight [kg]	1,9
optimal instalation height [m]	3 - 4
max instalation height[m]	5
min instalation height[m]	3
heat output	medium
cable length [m]	bus duct
material	aluminium
color	black / white






Apollo MH 70W / DRE / 2022 / Warsaw Home / Warsaw

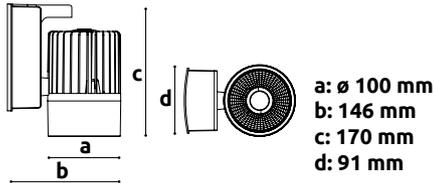

EOS LED

+ info

quantity	black - warm : 78 black - neutral: 228 white - neutral-na: 193
reordering option	yes
wattage [W]	37
luminous flux [Lm]	4700 - 4900
color temperature [K]	3000 - 4000
base	LED COB
beam angle [°]	24
weight [kg]	1,2
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	low
cable length [m]	bus duct
material	aluminium
color	black / white



KRONOS

+ info


quantity	62
reordering option	no
wattage [W]	70
luminous flux [Lm]	6600
color temperature [K]	3000 - 4200
base	G12
beam angle [°]	20
weight [kg]	1,1
optimal instalation height [m]	3 - 4
max instalation height[m]	4,5
min instalation height[m]	2,8
heat output	high
cable length [m]	bus duct
material	aluminium
color	white




EOS LED / Ciarko / 2021 / Warsaw Home / Warsaw

AQFORM HYPER**+ info**

quantity	72
reordering option	yes
wattage [W]	28,5
luminous flux [Lm]	1547
color temperature [K]	3000 - 2340
base	LED SMD
beam angle [°]	0,5
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	high
cable length [m]	bus duct
material	aluminium
color	black

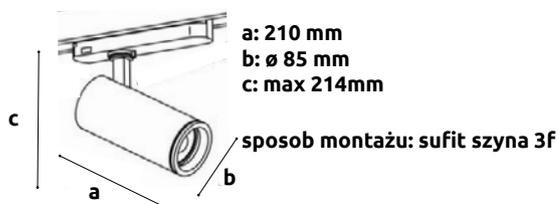
**ZUMA LINE****+ info**

quantity	2
reordering option	yes
wattage [W]	50
luminous flux [Lm]	6600
color temperature [K]	3000 - 4200
base	G12
beam angle [°]	20
weight [kg]	1,1
optimal instalation height [m]	3 - 4
max instalation height[m]	4,5
min instalation height[m]	2,8
heat output	high
cable length [m]	bus duct
material	aluminium
color	black




BOLONIA**+ info**

	cold	neutral	neutral
quantity	40	20	21
reordering option	no	no	no
wattage [W]	150	150	150
luminous flux [Lm]	12000	12000	12000
color temperature [K]	5350	4200	4200
base	RX7S-24	RX7S-24	RX7S-24
beam angle [°]	90 - 120	90 - 120	90 - 120
weight [kg]	4,35	4,35	4,35
optimal instalation height [m]	4 - 5	4 - 5	4 - 5
max instalation height[m]	5	5	5
min instalation height[m]	3	3	3
heat output	high	high	high
cable length [m]	1	1	busb duct
material	aluminium	aluminium	aluminium
color	grey	grey	grey

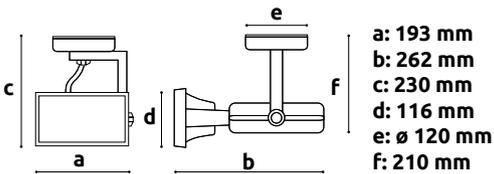**KANLUX MH 400W****+ info**

quantity	149
reordering option	yes
wattage [W]	400
luminous flux [Lm]	41000
color temperature [K]	4500
base	E40
beam angle [°]	180
weight [kg]	7,9
optimal instalation height [m]	5 - 6
max instalation height[m]	6
min instalation height[m]	5
heat output	high
cable length [m]	1,5
material	aluminium
color	black

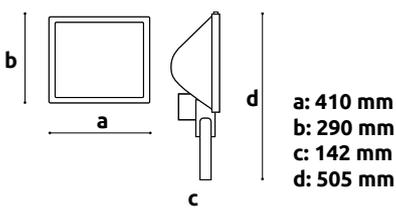




Kanlux MH 400W / Soraris / 2021 / Transexpo / Kielce



PAR 575

+ info

quantity	silver - 33 black - 70
reordering option	yes
wattage [W]	575
luminous flux [Lm]	49000
color temperature [K]	7200
base	GX 9,5
beam angle [°]	25
weight [kg]	13,6
optimal instalation height [m]	5 -6
max instalation height[m]	7
min instalation height[m]	5
heat output	high
cable length [m]	1
material	metal
color	black




a: 240 mm
b: 240 mm
c: 270 mm
d: 306 mm

PAR LED COMPACT

+ info



quantity	25
reordering option	yes
wattage [W]	23
luminous flux [Lm]	-
color temperature [K]	3200 - 6000
base	LED
beam angle [°]	40
weight [kg]	2,6
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	low
cable length [m]	1
material	aluminium
color	black




a: 290 mm
b: 275 mm



PAR 575 / Techmatk / 2019 / Bauma / Munich

PAR LED CAMEO**+ info**

quantity	59
reordering option	yes
wattage [W]	140
luminous flux [Lm]	16000
color temperature [K]	2700 - 6500
base	LED
beam angle [°]	30
weight [kg]	5
optimal instalation height [m]	4 - 5
max instalation height[m]	5,5
min instalation height[m]	3,5
heat output	low
cable length [m]	1
material	metal , glass
color	black




a: 230 mm
b: 230 mm
c: 135 mm



PAR LED CAMEO / Pesa / 2022 / Innotrans / Berlin

PAR LED COB 250 W**+ info**

quantity	134
reordering option	yes
wattage [W]	250
luminous flux [Lm]	30 000
color temperature [K]	2000 - 9000
base	COB 5w1
beam angle [°]	37
weight [kg]	3,6
optimal instalation height [m]	4
max instalation height[m]	5
min instalation height[m]	3,5
heat output	low
cable length [m]	1,85
material	plastic
color	black




a: 230 mm
b: 270 mm
c: 20mm




PAR LED COB 250W / Drutex / 2022 / Frontale / Nuremberg

LAMP LED V-TAC**+ info**

quantity	299
reordering option	yes
wattage [W]	300
luminous flux [Lm]	34500
color temperature [K]	6400
base	SAMSUNG LED
beam angle [°]	100
weight [kg]	6,52
optimal instalation height [m]	5- 6
max instalation height[m]	6
min instalation height[m]	5
heat output	low
cable length [m]	without plug
material	aluminum
color	black

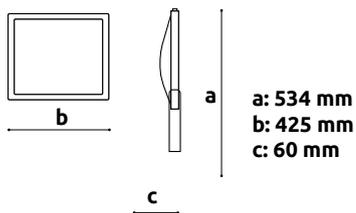
**LAMPA LED V-TAC****+ info**

quantity	13
reordering option	yes
wattage [W]	100
luminous flux [Lm]	8200
color temperature [K]	4000
base	SAMSUNG LED
beam angle [°]	100
weight [kg]	1,6
optimal instalation height [m]	5- 6
max instalation height[m]	6
min instalation height[m]	5
heat output	low
cable length [m]	without plug
material	aluminum
color	black

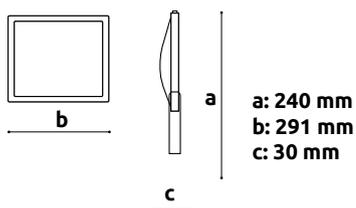


LAMPA LED CZARNA V-TAC 6500K - 300W

quantity	189
reordering option	yes
wattage [W]	300
luminous flux [Lm]	26390
color temperature [K]	6500
base	SAMSUNG LED
beam angle [°]	115
weight [kg]	1,6
optimal instalation height [m]	5- 6
max instalation height[m]	6
min instalation height[m]	5
heat output	low
cable length [m]	without plug
material	aluminum
color	black

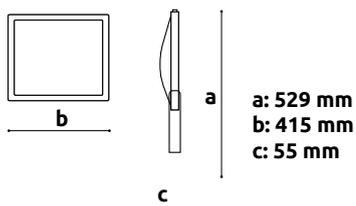


ELATION KL FRESNEL**+ info**

quantity	55
reordering option	yes
wattage [W]	350
luminous flux [Lm]	-
color temperature [K]	5600
base	LED
beam angle [°]	11 - 57
weight [kg]	12,7
optimal instalation height [m]	5- 6
max instalation height[m]	6
min instalation height[m]	5
heat output	low
cable length [m]	1,0
material	aluminum
color	black



a: 326 mm
b: 456 mm
c: 410mm

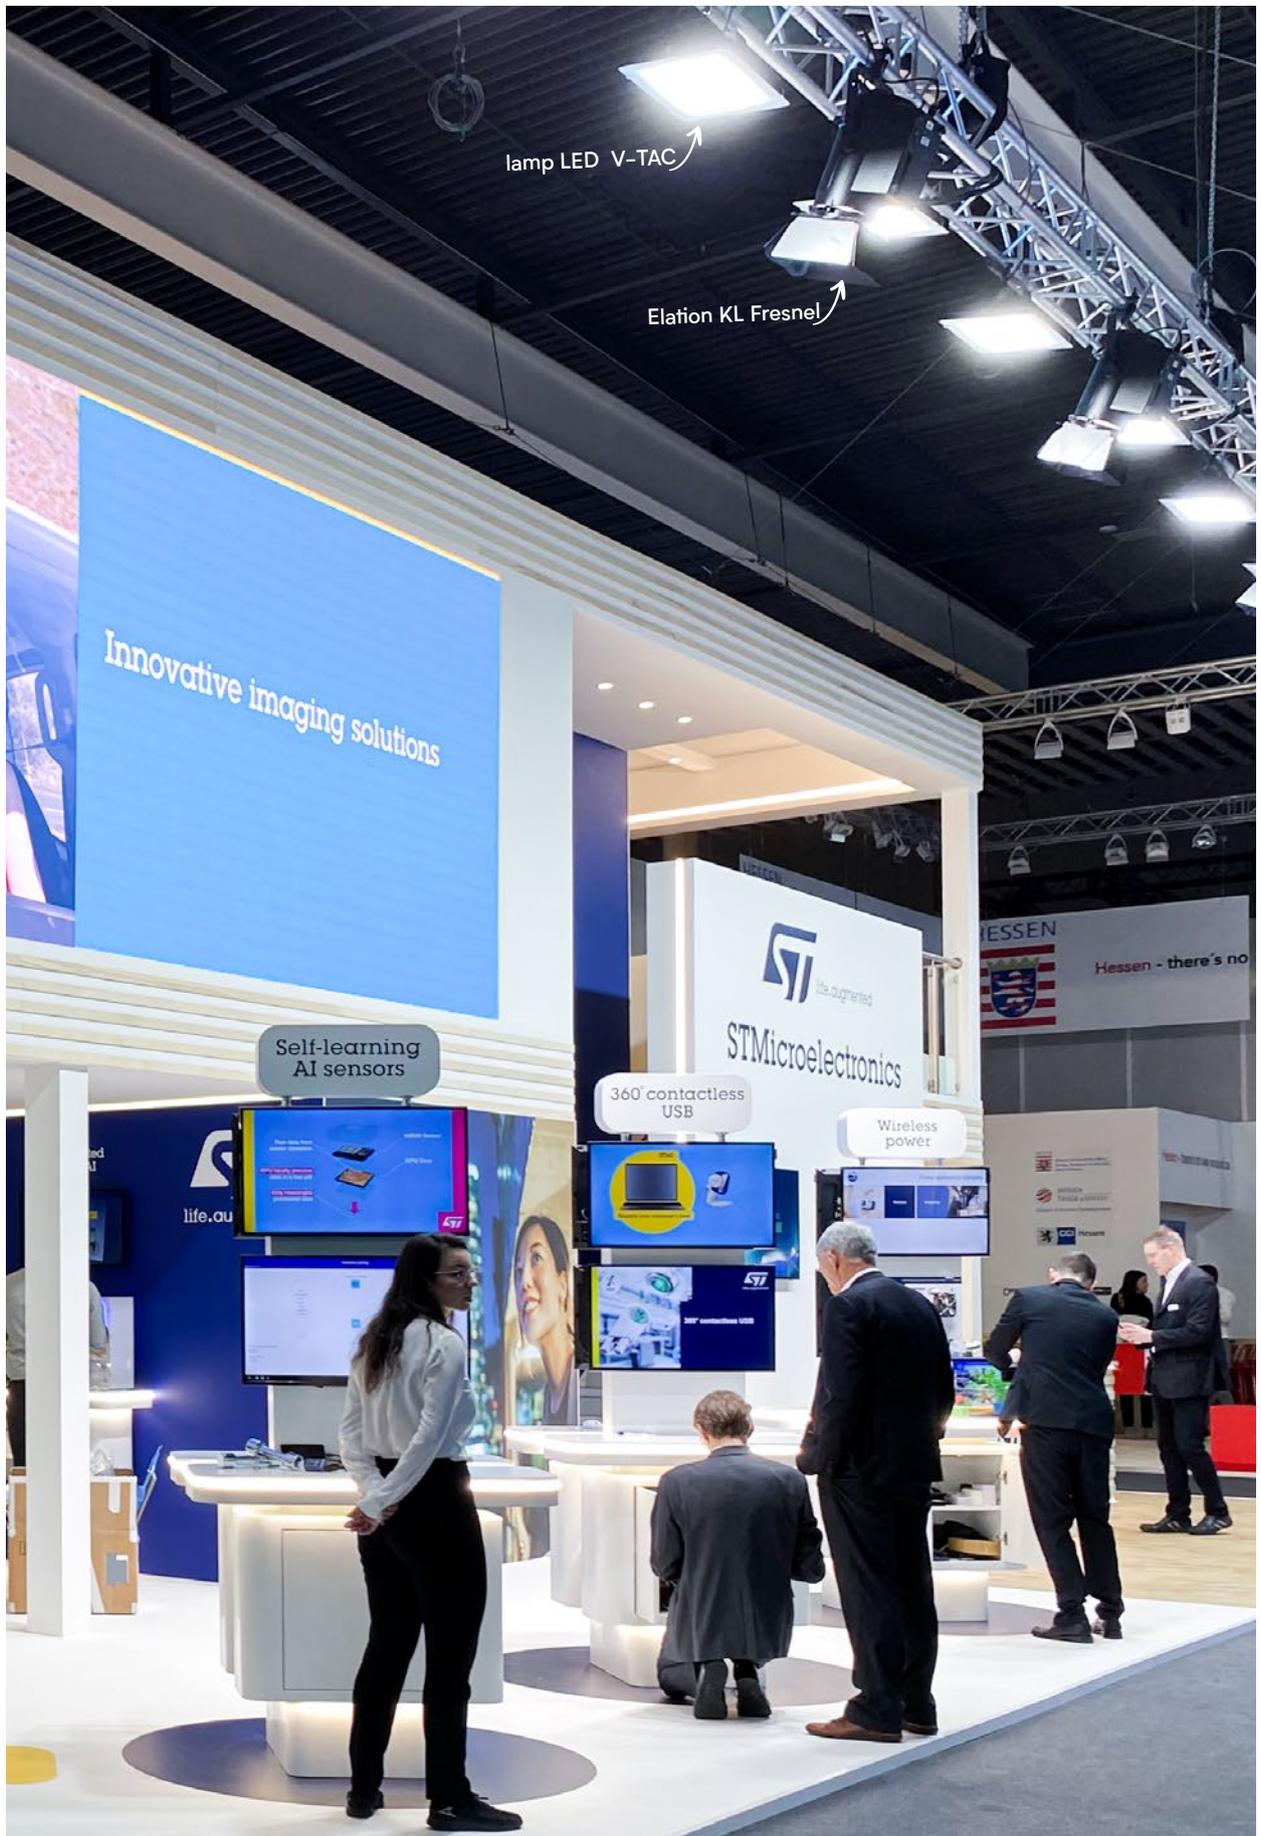

lamp LED V-TAC

Elation KL Fresnel

Innovative imaging solutions

Self-learning AI sensors

360° contactless USB

Wireless power

STMicroelectronics


ELATION KL FRESNEL + LAMP LED V-TAC / STMicro / 2023 / MWC

FLOOR LAMP KANLUX BERG DL-350

+ info



quantity	43
reordering option	yes
wattage [W]	35
luminous flux [Lm]	550
color temperature [K]	2700-6500
base	GU-10
beam angle [°]	120
weight [kg]	0,75
optimal instalation height [m]	floor
heat output	low
cable length [m]	-
material	stainless steel
color	silver




a: 145 mm
b: 109 mm
otwór montażowy: 99 mm

WATER EFFECT LIGHT

+ info



quantity	10
reordering option	yes
wattage [W]	23,8
luminous flux [Lm]	-
color temperature [K]	2700 - 6500
base	LED
beam angle [°]	120
weight [kg]	3,5
optimal instalation height [m]	3
max instalation height[m]	3
min instalation height[m]	3
heat output	low
cable length [m]	1,5
material	steel
color	black




a: 236 mm
b: 187 mm
c: 229 mm



2_DOWNLIGHT

HQI 35W**+ info**


quantity	39
reordering option	yes
wattage [W]	35
luminous flux [Lm]	3045
color temperature [K]	4200
base	G12
beam angle [°]	90 - 120
weight [kg]	2,7
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	medium
cable length [m]	1
material	metal
color	white



a: ø 190 mm
b: 172 mm
mounting hole: 182 mm

HQI 150W**+ info**

quantity	64
reordering option	tak
wattage [W]	150
luminous flux [Lm]	13000
color temperature [K]	4200
base	G12
beam angle [°]	90
weight [kg]	3,9
optimal instalation height [m]	3 - 4
max instalation height[m]	4
min instalation height[m]	3
heat output	high
cable length [m]	1
material	aluminium
color	silver



a: ø 205 mm
b: 183 mm
mounting hole: 190 mm



HQI 35W / AIC EU / 2023 / ISH / Frankfurt

LED CEILING LIGHT FITTINGS 6W

+ info



quantity	13
reordering option	no
wattage [W]	6
luminous flux [Lm]	-
color temperature [K]	6500
base	LED
beam angle [°]	120 - 160
weight [kg]	0,2
optimal instalation height [m]	do 2
max instalation height[m]	2
min instalation height[m]	0,6
heat output	low
cable length [m]	1m
material	plastic
color	white




LED CEILING LIGHT FITTINGS 12W

+ info



quantity	22
reordering option	no
wattage [W]	12
luminous flux [Lm]	960
color temperature [K]	6000 - 6400
base	LED COB
beam angle [°]	90
weight [kg]	0,45
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	aluminium
color	white




LED CEILING LIGHT FITTINGS 15W

+ info



quantity	43
reordering option	no
wattage [W]	15
luminous flux [Lm]	-
color temperature [K]	6000 - 6500
base	LED
beam angle [°]	120 - 160
weight [kg]	0,5
optimal instalation height [m]	do 2,8
max instalation height[m]	do 2,8
min instalation height[m]	0,6
heat output	low
cable length [m]	1
material	plastic
color	white




BENQ LED CEILING LIGHT FITTINGS

+ info



quantity	22
reordering option	no
wattage [W]	7
luminous flux [Lm]	620
color temperature [K]	6500
base	LED SMD
beam angle [°]	40
weight [kg]	0,35
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white




LED CEILING LIGHT FITTINGS 12W 6000-6500 AREA LED

+ info




quantity	421
reordering option	yes
wattage [W]	12
luminous flux [Lm]	960
color temperature [K]	6000 - 6500
base	LED COB
beam angle [°]	90
weight [kg]	0,45
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	aluminium
color	white



a: ø 110 mm
mounting hole: 90 mm

LED CEILING LIGHT FITTINGS KOBİ OH 36W


+ info



quantity	14
reordering option	yes
wattage [W]	10
luminous flux [Lm]	550
color temperature [K]	2700 - 6500
base	GU - 10
beam angle [°]	120
weight [kg]	0,27
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	5
heat output	low
cable length [m]	-
material	metal
color	black

KOBİ OH42 DOUBLE / TRIPPLE

+ info



	double	triple
quantity	6	54
reordering option	yes	yes
wattage [W]	2 x 10	3 x 10
luminous flux [Lm]	1140	1710
color temperature [K]	2700 - 6500	2700 - 6500
base	GU - 10	GU - 10
beam angle [°]	90 - 160	90 - 160
weight [kg]	1,0	1,3
optimal instalation height [m]	2 - 3	2 - 3
max instalation height[m]	3	3
min instalation height[m]	2	2
heat output	medium	medium
cable length [m]	1	1
material	aluminium	aluminium
color	silver	silver

DOWNLIGHT COB 10W

+ info

cold temperature:

quantity	103
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	6000 - 6500
base	LED COB
beam angle [°]	80
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white

neutral temperature:

quantity	287
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	4000
base	LED COB
beam angle [°]	90
weight [kg]	0,4
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white

warm temperature:

quantity	109
reordering option	yes
wattage [W]	10
luminous flux [Lm]	950
color temperature [K]	3000
base	LED COB
beam angle [°]	90
weight [kg]	0,55
optimal instalation height [m]	2 - 3
max. instalation height [m]	3
min. instalation height [m]	2
heat output	low
cable length [m]	1,5
material	aluminium
color	white




cold



neutral



warm



cold:
 a: ø110 mm
 b: 70 mm
 mounting hole: 98 mm

neutral:
 a: ø110 mm
 b: 75 mm
 mounting hole: 98 mm

warm:
 a: ø140 mm
 b: 70 mm
 mounting hole: 120 mm





DOWNLIGHT COB 10W - neutral / Pesa / 2023 / TRAKO / Gdańsk

LED CEILING LIGHT FITTINGS COB 10W SUPER LED

+ info



quantity	169
reordering option	yes
wattage [W]	10
luminous flux [Lm]	650
color temperature [K]	6000 - cold
base	LED COB
beam angle [°]	90
weight [kg]	0,4
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,3 m
material	aluminium
color	white




a: ø 162 mm
b: 58 mm
mounting hole: 106 mm

LED CEILING LIGHT FITTINGS COB 12W

+ info



quantity	187
reordering option	yes
wattage [W]	12
luminous flux [Lm]	1100
color temperature [K]	6000 - cold
base	LED COB
beam angle [°]	90
weight [kg]	0,2
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,2
material	aluminium
color	white




a: 107 mm
b: 68 mm
mounting hole: 98 mm

LED CEILING LIGHT FITTINGS COB 15W

+ info



ilość	155
możliwość dokupienia	tak
moc [W]	15
strumień [Lm]	1400
barwa [K]	6000 - zimna
typ źródła światła	LED COB
kąt [°]	90
waga [kg]	0,35
sugerowana wys. montażu [m]	2 - 3
max wys montażu [m]	3
min wys. montażu[m]	2
emisja ciepła	niska
dł. kabla [m]	2,25
materiał	aluminium
kolor	biały




a: 138 mm
b: 83 mm
mounting hole: 121 mm

LED CEILING LIGHT FITTINGS COB 7W

+ info



quantity	69
reordering option	yes
wattage [W]	7
luminous flux [Lm]	550
color temperature [K]	6000
base	LED COB
beam angle [°]	90
weight [kg]	0,25
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2,25
material	plastic
colorw	hite




a: ø 85 mm
b: 70 mm
mounting hole: 70 mm

LED CEILING LIGHT FITTINGS FI60

+ info



quantity	469
reordering option	yes
wattage [W]	3 - 10
luminous flux [Lm]	350 - 560
color temperature [K]	2700 - 6500
base	GU - 10
beam angle [°]	90 - 120
weight [kg]	0,10
optimal instalation height [m]	do 2
max instalation height[m]	do 2
min instalation height[m]	0,6
heat output	low
cable length [m]	-
material	aluminium
color	silver



a: \varnothing 85 mm
mounting hole: 60 mm

LED CEILING LIGHT BIANCO 8W/4000K

+ info



quantity	22
reordering option	yes
wattage [W]	8
luminous flux [Lm]	400
color temperature [K]	4000
base	GU - 10
beam angle [°]	36
weight [kg]	0,35
optimal instalation height [m]	1-2
max instalation height[m]	3
min instalation height[m]	2
heat output	white neutral
cable length [m]	-
material	aluminum
color	black



b a: \varnothing 75 mm
b: 84 mm

ROLI TUBE 15W

+ info

quantity	54
reordering option	yes
wattage [W]	15
luminous flux [Lm]	1200
color temperature [K]	4000
base	LED
beam angle [°]	-
weight [kg]	0,35
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	white neutral
cable length [m]	1,5
material	metal
color	black



b


a: ø 150 mm
b: 900 mm



3_ARMS

JEWELLERY ARM LED LIGHT 30 CM

+ info




a: 300 mm

quantity	31
reordering option	yes
wattage [W]	2 x 1,5
luminous flux [Lm]	2 x 80
color temperature [K]	4000
base	LED
beam angle [°]	38
weight [kg]	0,5
optimal instalation height [m]	cabinets / expositions
max instalation height[m]	-
min instalation height[m]	-
heat output	low
cable length [m]	2,2
material	aluminium
color	black

JEWELLERY ARM LED LIGHT 22 CM

+ info




a: 220 mm

quantity	5
reordering option	yes
wattage [W]	0,9
luminous flux [Lm]	50 - 70
color temperature [K]	5000 - 6000
base	LED
beam angle [°]	90 - 100
weight [kg]	0,15
optimal instalation height [m]	cabinets / expositions
max instalation height[m]	-
min instalation height[m]	-
heat output	low
cable length [m]	0,2
material	aluminium
color	silver

HALOGEN ARM LIGHT ELSTAR

+ info

quantity	120
reordering option	yes
wattage [W]	150
luminous flux [Lm]	2250
color temperature [K]	2900
base	R7S
beam angle [°]	80 - 90
weight [kg]	0,65
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	high
cable length [m]	1,5
material	aluminium
color	grey




ciepta: zimna:
a: 135 mm a: 145 mm
b: 485 mm b: 500 mm

LED ARM LIGHT

+ info


quantity	395
reordering option	yes
wattage [W]	23
luminous flux [Lm]	1547
color temperature [K]	6000 - 6500
base	LED SMD
beam angle [°]	-
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2
material	aluminium
color	silver



a: 145 mm
b: 500 mm


WYSIĘGNIK LEDOWY CZARNY

+ info



a: 135 mm
b: 480 mm


quantity	200
reordering option	yes
wattage [W]	30
luminous flux [Lm]	2250
color temperature [K]	3000 4000,6000
base	R7S
beam angle [°]	120
weight [kg]	0,5
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2
material	aluminium
color	black

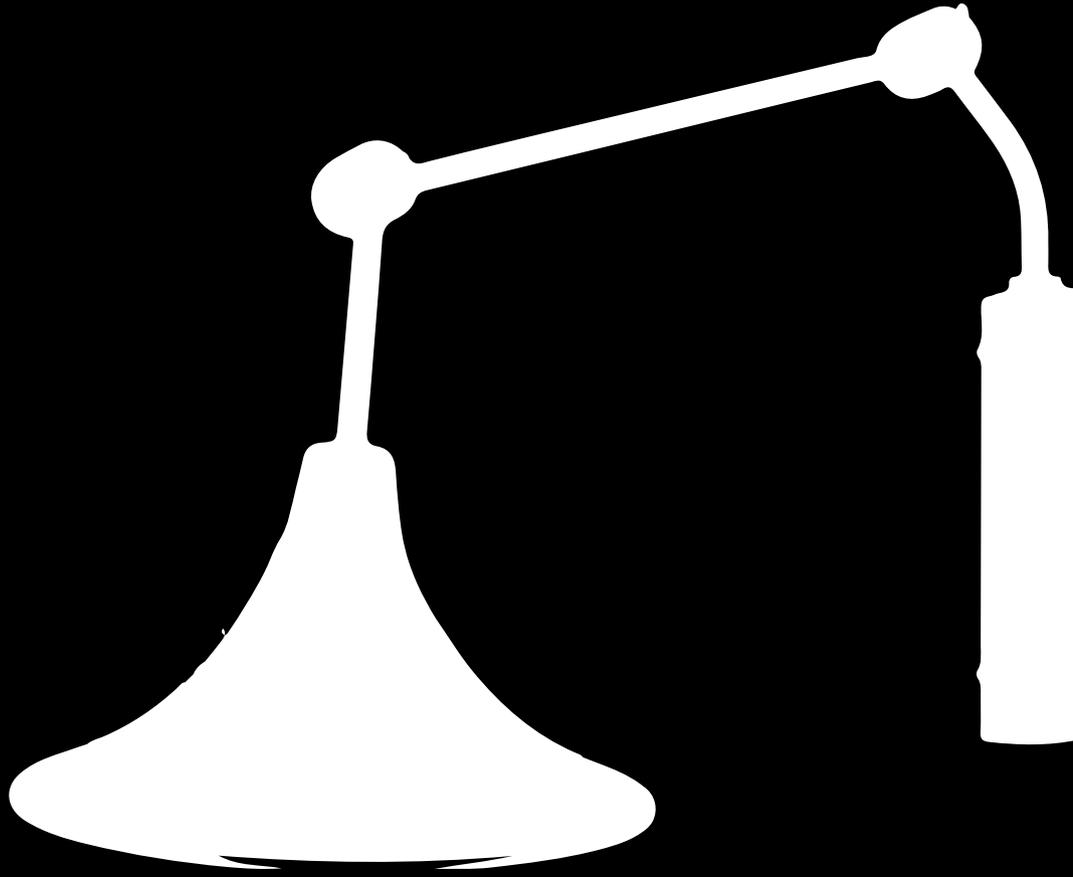

4_WALL LAMP


ANTIKA BLACK**+ info**


quantity	11
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E-27
beam angle [°]	100 - 160
weight [kg]	1,3
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low




LOFT**+ info**

quantity	black - 12 blue - 8
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	100 - 160
weight [kg]	1,1
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	steel
color	black, blue

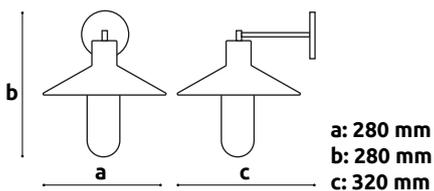

**+ info**


quantity	10
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E-27
beam angle [°]	100 - 160
weight [kg]	1,3
heat output	low
material	glass
color	white

BROLO**+ info**

quantity	5
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	2 x E27
beam angle [°]	180
weight [kg]	0,65
optimal instalation height [m]	2 -3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	plastic
color	white

LILHOLMEN

+ info




a: ø 140 mm
b: 250 mm
c: 160 mm

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E-14
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	metal + glass
color	brass

INSPIRE


+ info



a: 180 mm
b: 145 mm
c: 125 mm

quantity	14
reordering option	yes
wattage [W]	4,6
luminous flux [Lm]	400
color temperature [K]	3000
base	LED
beam angle [°]	90
weight [kg]	0,6
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	steel + plastic
color	chrome


NYMANE



+ info

quantity	black - 54 white - 12
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	LED GU10
beam angle [°]	90 - 160
weight [kg]	0.45
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	steel, powder coating + aluminum
color	black, white

JUPITER IGON E-14



+ info


quantity	2
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
beam angle [°]	90
weight [kg]	2
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
material	metal + glass
color	black



NYMANE / Wiśniowski / 2023 / BAU / Munich

NYMANE GU-10 + info


quantity	7
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	GU10
beam angle [°]	depending on the light source
weight [kg]	0,35
optimal instalation height [m]	1 - 2
max instalation height[m]	-
min instalation height[m]	-
heat output	white neutral
material	steel, powder coating + aluminum
color	black



a: ø 70 mm
b: 150 mm
c: min gt 70 mm - max gt 590 mm

KAVE HOME + info

quantity	4
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
beam angle [°]	depending on the light source
weight [kg]	0,8
optimal instalation height [m]	1 - 2
max instalation height[m]	2
min instalation height[m]	1
heat output	white neutral
material	steel
color	black

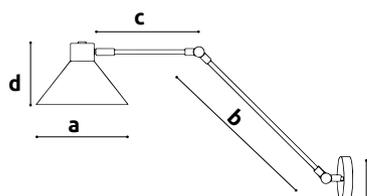


a: ø 200,5 mm
b: 390 mm
c: 230 mm
d: 140,5 mm



KAVE HOME DIONE E14 / BP2 / 2023 / BAU / Munich


INTIS + info



a: 150 mm
b: 150 mm

quantity	29
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
beam angle [°]	90-160
weight [kg]	0,8
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	1
heat output	white neutral
material	powder-coated metal and glass shade
color	white + black

STARLING + info



a: 140 mm
b: ø 330 mm
c: 120 mm



quantity	2
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	1xG9
beam angle [°]	90-160
weight [kg]	0,8
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	1
heat output	white neutral
material	powder-coated metal and glass shade
color	white + gold



INTIS / DRE / 2023 / WARSAW HOME / Warsaw


ZERO + info


quantity	2
reordering option	yes
wattage [W]	max. 5
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
beam angle [°]	90-160
weight [kg]	0,8
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	1
heat output	white neutral
material	powder-coated metal and glass shade
color	white + black

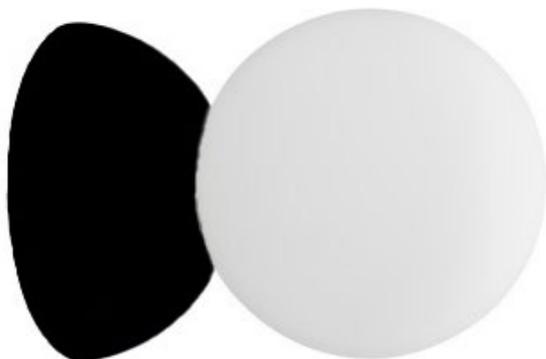

RISERVA + info

quantity	9
reordering option	yes
wattage [W]	16
luminous flux [Lm]	1800
color temperature [K]	6500
base	LED
beam angle [°]	160
weight [kg]	0,8
optimal instalation height [m]	2,5
max instalation height[m]	2,5
min instalation height[m]	1
heat output	white neutral
material	acrylic
color	black



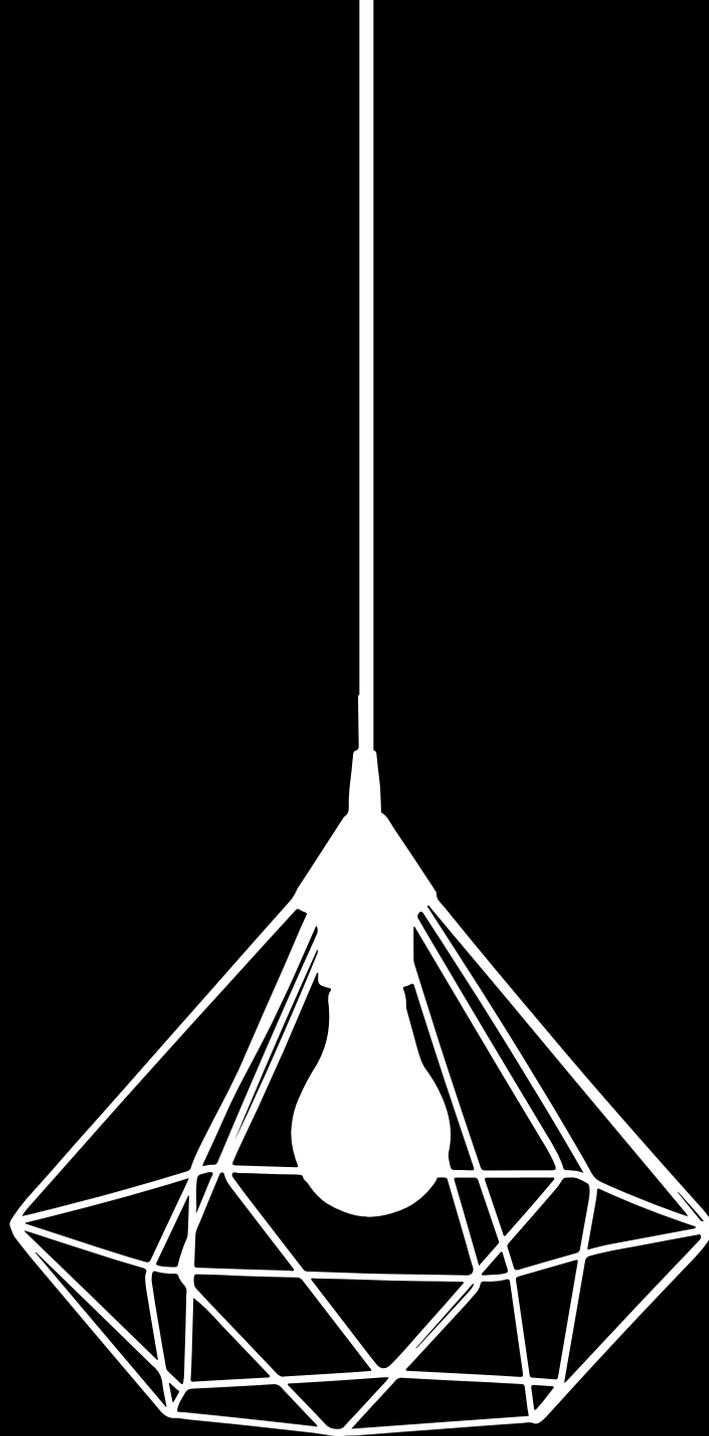


5_DECORATIVE LAMPS



EGLO RONDO

+ info


quantity	113
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,4
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2 - 5
material	glass
color	white, chrom



FREDIKA


+ info

quantity	5
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	2,5
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	0,4
material	glass
color	white, black






EGLO RONDO / DRE / 2022 / Warsaw Home / Warsaw



SOLLUX UGO

+ info

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,4
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2 - 5
material	glass
color	white, chrome



LEMIR

+ info


quantity	45
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,4
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2 - 5
material	glass
color	red


BALL**+ info**

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27 A55, E27 A60, E27 P45
beam angle [°]	depending on the light source
weight [kg]	3,6
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1
material	glass, steel
color	white, steel

**MODERN****+ info**

quantity	blue - 33 orange - 10
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2 - 5
material	glass
color	transparent, blue




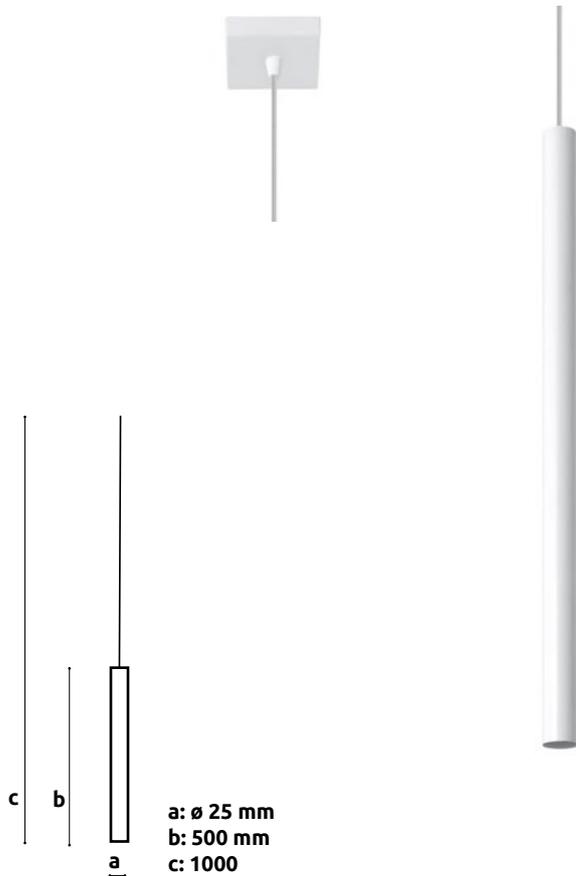

PASTELO 1X40W

+ info

quantity	5
reordering option	yes
wattage [W]	max 12
luminous flux [Lm]	750
color temperature [K]	400
base	G9
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	2
max instalation height[m]	5
min instalation height[m]	1,3
heat output	low
cable length [m]	0,5
material	steel
color	white

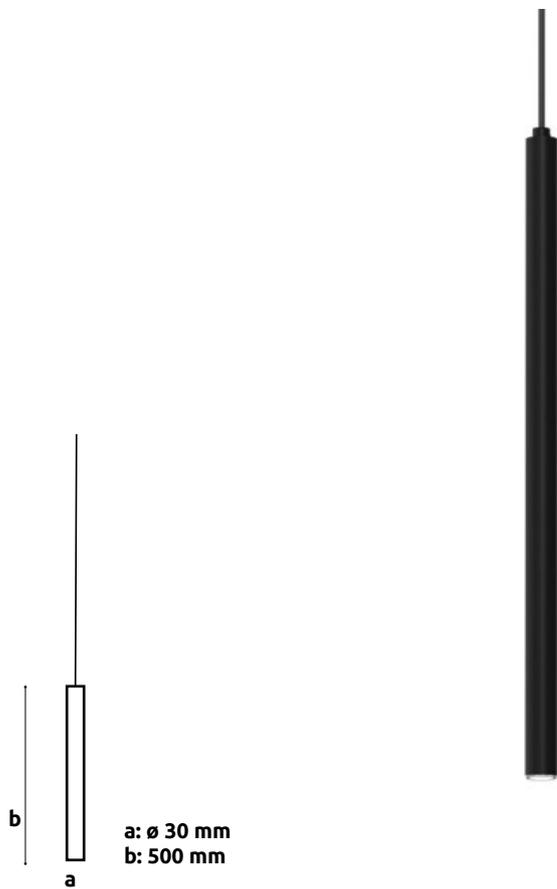

TUBA G9

+ info

quantity	2,30 2,40m - 32 2,5 2,7m - 12 3m - 16
reordering option	yes
wattage [W]	8
luminous flux [Lm]	750
color temperature [K]	400
base	G9
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	2
max instalation height[m]	5
min instalation height[m]	1,3
heat output	low
cable length [m]	2,30 - 3
material	steel
color	black




TUBA G9 / Wiśniowski / 2023 / BAU / Munich



EYE

+ info

quantity	27
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	G10
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	1,3
max instalation height[m]	5
min instalation height[m]	1,3
heat output	low
cable length [m]	1,20
material	steel
color	black




a: ø 55 mm
b: 250 mm



GRAPHITE

+ info


quantity	9
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	G10
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	1,3
max instalation height[m]	5
min instalation height[m]	1,3
heat output	low
cable length [m]	1,5
material	steel




a: 60 x 60 mm
b: 900 mm

TUBO 4 BLACK + info

ilość	1
możliwość dokupienia	tak
moc [W]	max. 40W
strumień [Lm]	968
barwa [K]	3000
typ źródła światła	E14
kąt [°]	w zależności od źródła światła
waga [kg]	0,5
sugerowana wys. montażu [m]	2-3
max wys montażu [m]	3
min wys. montażu[m]	2
emisja ciepła	niska
dł. kabla [m]	1
materiał	metal
kolor	czarny mat

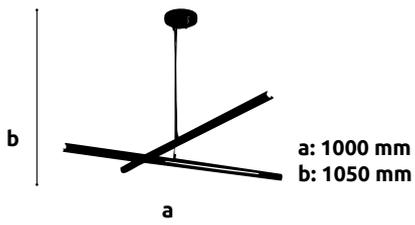

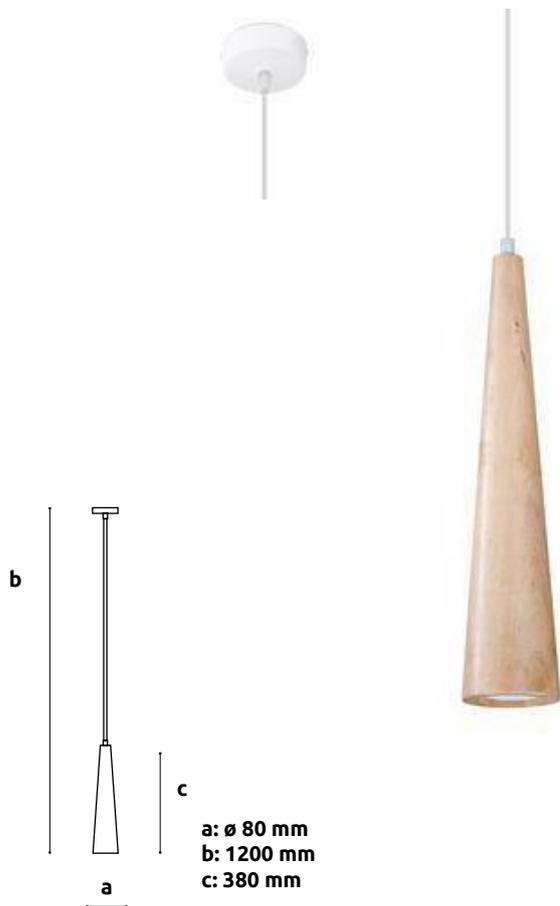

SOLLUX

+ info


quantity	4
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	GU10
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2,5-3
max instalation height[m]	5
min instalation height[m]	2,5
heat output	low
cable length [m]	1
material	wood
color	wood



TUBA GU-10

+ info

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	1700
color temperature [K]	2700 - 6500
base	GU10
beam angle [°]	depending on the light source
weight [kg]	0,8
optimal instalation height [m]	2,3
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1
material	aluminum
color	white

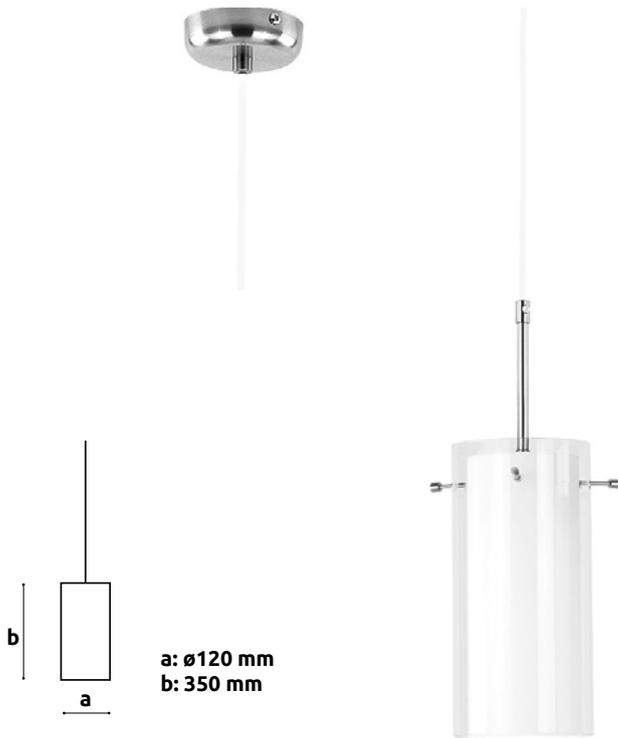

ALFA BOLT


+ info


quantity	10
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1
optimal instalation height [m]	od 1,3
max instalation height[m]	5
min instalation height[m]	1,3
heat output	low
cable length [m]	1,5
material	glass
color	white

BUBLIK

+ info

quantity	2
reordering option	yes
wattage [W]	15
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	0,8
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1,38
material	glass
color	cement

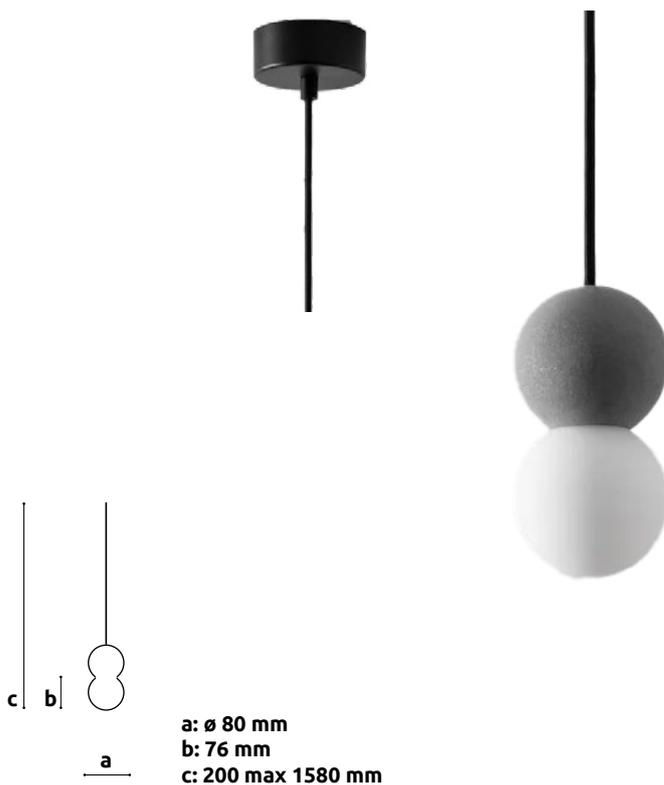




TAMEN INSPIRE

+ info

quantity	11
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,25
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2
material	plastic
color	black



GAUCHO

+ info

quantity	2
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,25
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1
material	plastic
color	white




TAMEN INSPIRE / Drutex / 2016 / SAIE / Bologna




RETRO

+ info

quantity	3
reordering option	yes
wattage [W]	6E+1
luminous flux [Lm]	1521
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	1,25
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1
material	metal
color	white




a: ø 200 mm
b: 1250 mm

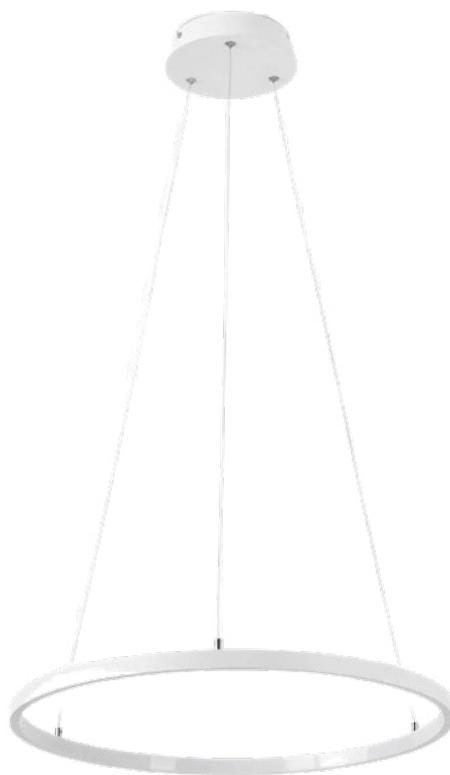


LED BREDA

+ info


quantity	1
reordering option	yes
wattage [W]	LED max 24
luminous flux [Lm]	968
color temperature [K]	3000
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	metal
color	white



a: ø 500 mm
b: 840, 1430 mm

ARABICA**+ info**

quantity	3
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	2 - 5
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	plywood
color	natural wood


PORTORYKO**+ info**

quantity	6
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	1,2
optimal instalation height [m]	3 - 5
max instalation height[m]	5
min instalation height[m]	3
heat output	low
cable length [m]	1
material	plywood
color	natural wood




ARABICA / Pol - Skone / 2018 / Budma / Poznań

CARUBA



+ info


quantity	6
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,6
optimal instalation height [m]	2-5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2m
material	plastic



SPIDER

+ info

quantity	6
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	0,8
optimal instalation height [m]	2 - 5
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	2
material	plywood
color	natural wood



GRINDFALLET


+ info

quantity	5
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,45
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1,6
material	steel
color	black

ŻYRANDOL


+ info

quantity	9
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,5
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2
material	steel
color	black



INSPIRE

+ info




a: \varnothing 365 mm
b: 1600 mm

ilość	29
możliwość dokupienia	tak
moc [W]	depending on the light source
strumień [Lm]	depending on the light source
barwa [K]	2700-6500
typ źródła światła	E27
kąt [°]	280
waga [kg]	0,5
Sugerowana wys. montażu [m]	2 - 3
max wys montażu [m]	3
min wys. montażu[m]	2
emisja ciepła	niska
dł. kabla [m]	1,6
materiał	stal
kolor	czarny

TARBES

+ info





czarna
a: \varnothing 325 mm
b: 280 mm

biała
a: 300 mm
b: 300 mm

quantity	white - 10 black - 1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,45
optimal instalation height [m]	2 - 3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1 m
material	steel
color	white, black



CARUBA / 2018 / IFA / Berlin

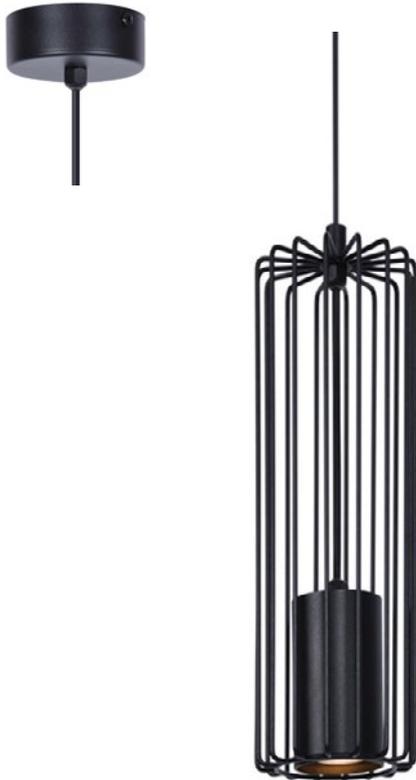


a: 100 mm
b: 1200 mm
c: 320 mm

KAJA

+ info

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	4930
base	GU10
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	metal
color	black



a: ø 120 mm
b: 210 mm

KOPENHAGEN LOFT

+ info

quantity	8
reordering option	yes
wattage [W]	12
luminous flux [Lm]	95
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,5
optimal instalation height [m]	od 1,3
max instalation height[m]	-
min instalation height[m]	od 1,3
heat output	low
cable length [m]	1,7
material	plastic
color	rusty



KOPENHAGEN LOFT / PKP / 2015 / Trako / Gdańsk

FITTINGS GWINT**+ info**

quantity	3m - 24 1,5m - 28
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	0,3
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,7
material	silicon
color	red






FITTINGS GWINT / Polregio / 2023 / Trako / Gdańsk

RAKIJA**+ info**



quantity	7
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700-6500
base	E27
beam angle [°]	280
weight [kg]	1,8
optimal instalation height [m]	2 - 5
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	2
material	glass
color	golden



a: ø 350 mm


FLOS AIM**+ info**

quantity	1
reordering option	yes
wattage [W]	50
luminous flux [Lm]	550
color temperature [K]	2200-900
base	E27
beam angle [°]	120
weight [kg]	7,2
optimal instalation height [m]	2,5 - 3
max instalation height [m]	3
min instalation height [m]	2,5
heat output	low
cable length [m]	2
material	aluminium
color	black

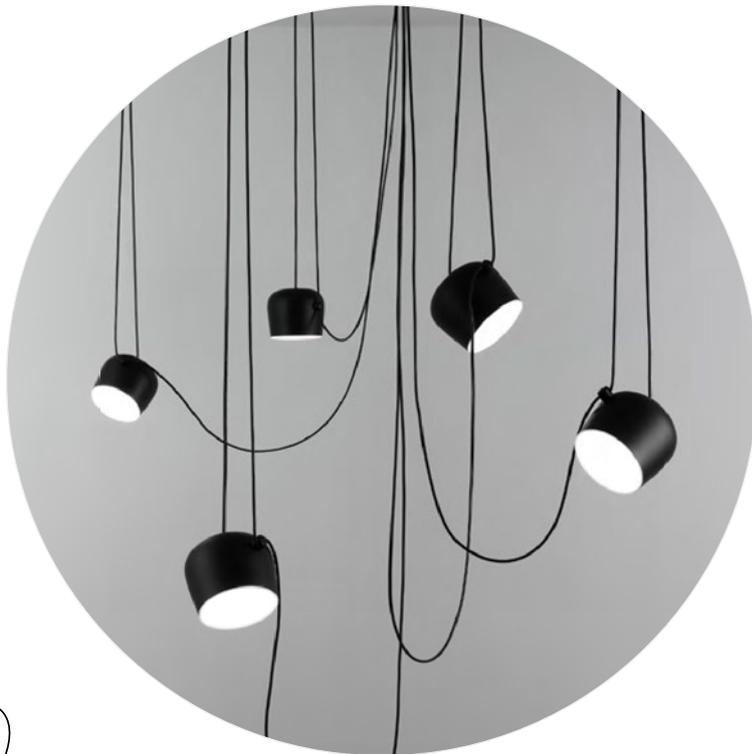
a: ø 150 mm
b: ø 155 mm

**BAS****+ info**

quantity	white - 2 black - 4
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	1521
color temperature [K]	2700-6500
base	E-14
beam angle [°]	280
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5 m
material	plate
color	white, black

**NORDLUX-BALANCE****+ info**

quantity	14
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	1700
color temperature [K]	2700
base	17,5WLED
beam angle [°]	120
weight [kg]	2
optimal instalation height [m]	2-5
max instalation height[m]	5
min instalation height[m]	2
heat output	warm white
cable length [m]	5
material	metal + acrylic
color	black

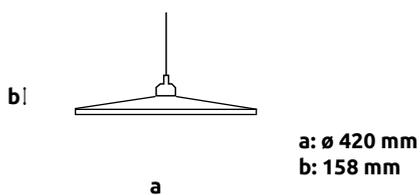




NORDLUX-BALANCE / Drutex / 2023 / BAU / Munich

LONG CHROM

+ info

quantity	8
reordering option	yes
wattage [W]	70
luminous flux [Lm]	-
color temperature [K]	2700
base	LED
beam angle [°]	-
weight [kg]	0,5
optimal instalation height [m]	2-5
max instalation height[m]	5
min instalation height[m]	2
heat output	warm white
cable length [m]	1,5
material	metal
color	chrome

bi

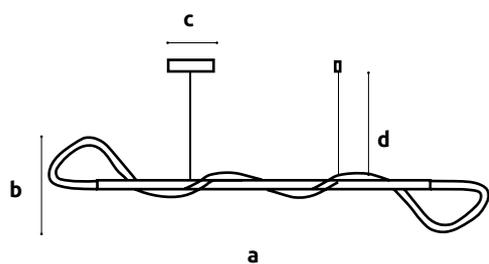


a: 1200 mm
 b: 260 mm
 c: ø 120
 d: 800



LONG CHROM / Juki / 2022 / TEXPROCESS / Frankfurt

PURE 2 BLACK

+ info

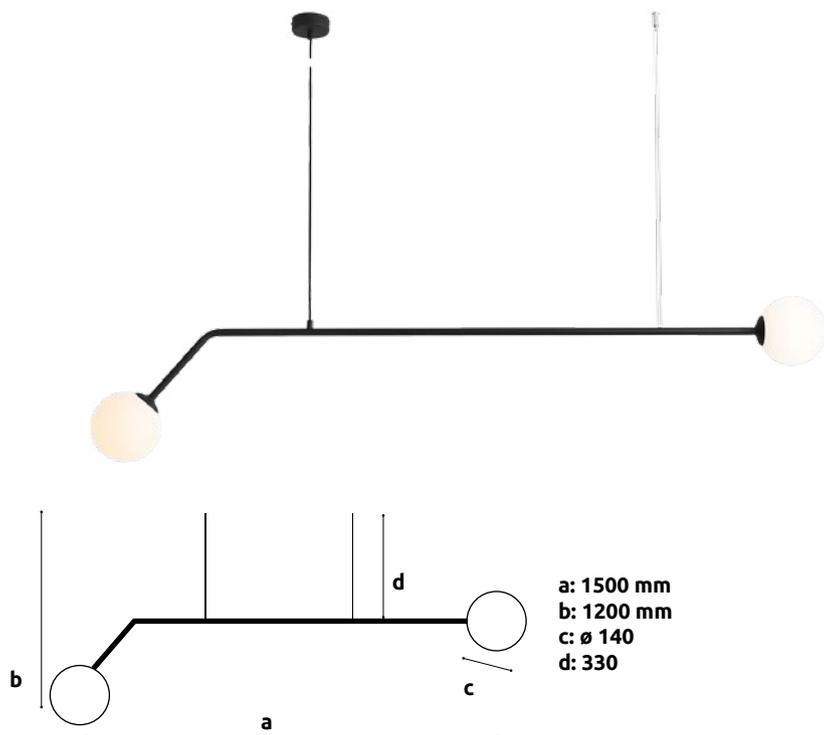

quantity	5
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700
base	E14
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-5
max instalation height[m]	5
min instalation height[m]	2
heat output	warm white
cable length [m]	1,5
material	metal

SORENTO

+ info



quantity	2
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-5
max instalation height[m]	5
min instalation height[m]	2
heat output	warm white
cable length [m]	1
material	metal
color	gold

EDO + info

quantity	9
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	metal




ARGON ERBA + info

quantity	9
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	LED
beam angle [°]	depending on the light source
weight [kg]	0,8
optimal instalation height [m]	1,3
max instalation height[m]	3
min instalation height[m]	1,3
heat output	warm white
cable length [m]	1,5
material	metal + acrylic
color	black




ITALUX SARH + info

quantity	14
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	metal + glass
color	white + gold

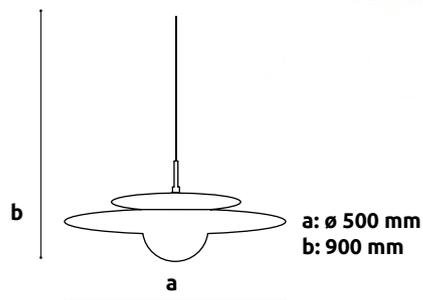


AXEL AZARDO + info

quantity	15
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	-
weight [kg]	1,4
optimal instalation height [m]	2-3
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	0,8
material	metal
color	black




ZENITH**+ info**

quantity	17
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	GU10
beam angle [°]	depending on the light source
weight [kg]	0,93
optimal instalation height [m]	2-3
max instalation height [m]	5
min instalation height[m]	2
heat output	low
cable length [m]	5
material	steel
color	white

**HERMINA****+ info**

quantity	6
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,8
optimal instalation height [m]	2-3
max instalation height [m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1
material	metal, wood, glass
color	white

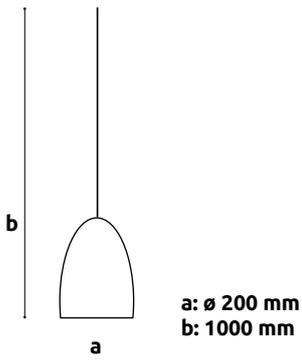

ALUMINIUM + info



quantity	11
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,93
optimal instalation height [m]	2-3
max instalation height[m]	5
min instalation height[m]	2
heat output	low
cable length [m]	1,20
material	aluminum, varnish
color	chrome

HEKTAR + info



quantity	dark gray ø 38 cm - 9 dark gray ø 47 cm - 7 white ø 38 cm - 1 dark gray ø 22 cm - 18 white ø 47 - 4
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,8
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,4
material	aluminum
color	white, dark gray

NYMANE W + info



quantity	2
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,93
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,20
material	aluminum, lacquer
color	white

PS 2014 3D + info



quantity	2
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	1
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	material polypropylene
color	white

RANARP + info



quantity	white - 5 black - 6
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	2
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,6
material	material polypropylene
color	black, white


MITRILA + info



quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	1,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	steel, powder coating
color	black, white

SKYMNINGEN + info

quantity	3
reordering option	no
wattage [W]	max 22
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	1
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	plastic
color	white

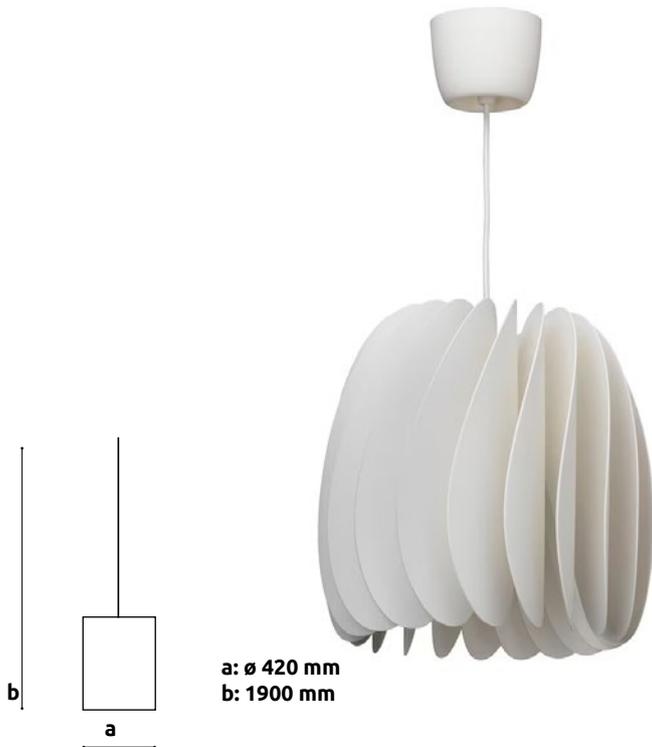


SINNERLIG + info

quantity	3
reordering option	no
wattage [W]	max 60
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1
material	wood
color	shades of brown and beige




NORDLUX + info



a: ø 300 mm
b: 227 mm

quantity	1
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	2,53
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	3
material	glass
color	white

FELSISK + info



a: 280 mm
b: 830 mm
c: 240 mm

quantity	1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light bulb
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	4,99
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	3
material	polypropylene
color	black


LIGHTING**+ info**

quantity	1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	200
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	1
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	warm white
cable length [m]	1
material	plastic
color	black

LUMINEX**+ info**


quantity	1
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	depending on the light source
weight [kg]	1
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	low
cable length [m]	1,5
material	plastic
color	black

6_ DECORATIVE STANDING

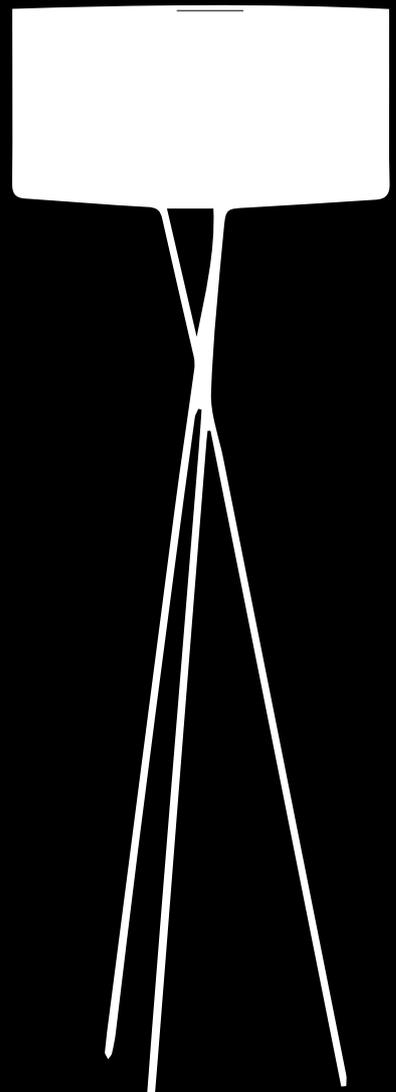

UPSTREET**+ info**


quantity	2
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	3
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1
material	wood + steel
color	black + chrome



a: ø 380 mm
b: 640 mm

INDUSTRIAL DESIGN**+ info**


quantity	1
reordering option	yes
wattage [W]	60
luminous flux [Lm]	1055
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	90 - 160
weight [kg]	3
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1
material	wood + steel
color	black + wood



a: ø 320 mm
b: 640 mm

VIDJA + info

quantity	28
reordering option	no
wattage [W]	max 7 Wat
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	1
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1,98
material	polyester, plastic, steel
color	white




a: ø 190 mm
b: min 138 mm
c: ø 360 mm

LAUTERS**+ info**

quantity	1
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2
material	solid ash, colorless lacquer acrylic
color	white, wood


**EGLO****+ info**

quantity	2
reordering option	yes
wattage [W]	60
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	3,98
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2
material	steel, fabric
color	chrome, white

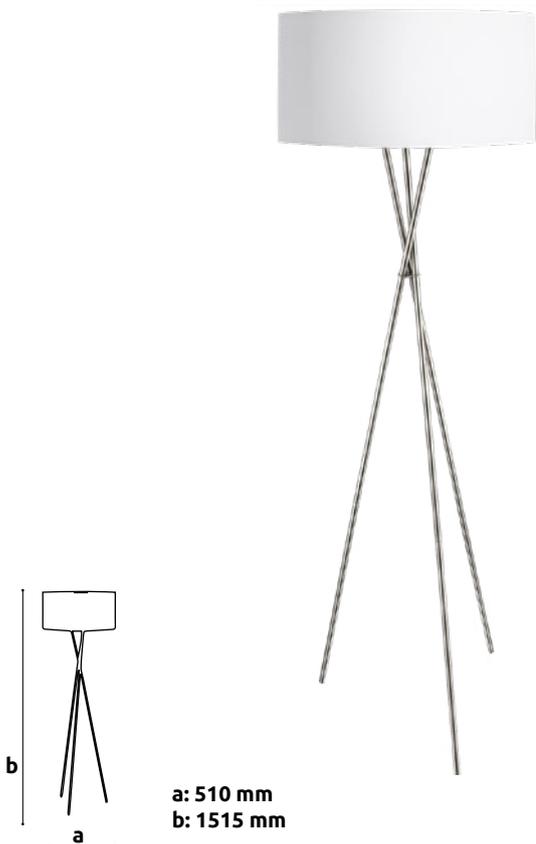

ALANG**+ info**

quantity	4
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	5
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2,5
material	steel, fabric
color	chrome, white

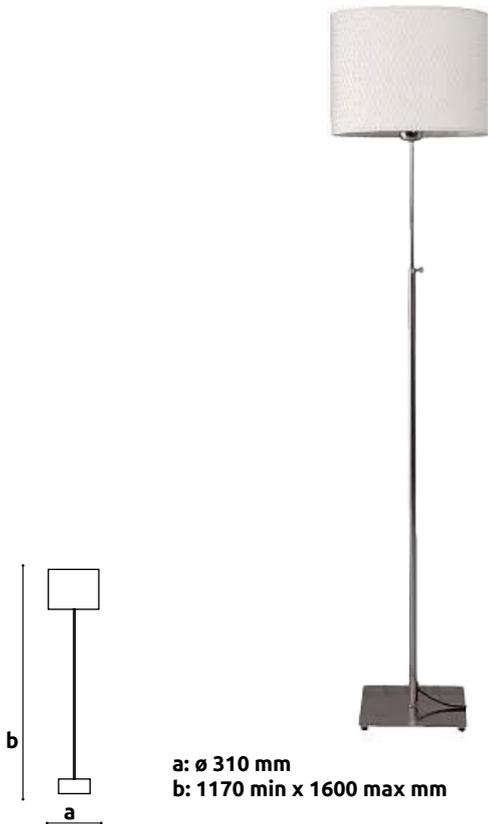
**ANEGLAND****+ info**

quantity	5
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2
material	steel, fabric
color	white, black



ARSTID**+ info**

quantity	2
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	4
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2,4
material	steel, fabric
color	chrome, white



a: \varnothing 280 mm
b: 1550 mm
c: \varnothing 360 mm

**NIUANCE****+ info**

quantity	1
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	4,55
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1
material	steel
color	chrome, white




a: \varnothing 360 mm
b: 1670 mm



NYFORS

+ info

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	4
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2,3
material	steel, fabric
color	chrome, white




a: ø 380 mm
b: min 1380 max 1680 mm
c: ø 280 mm



PS 2014

+ info

quantity	2
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2,3
material	steel, plastic
color	white



a: ø 330 mm
b: min 161
c: ø 280 mm



RANARP M

+ info

quantity	5
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E27
weight [kg]	7
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1,85
material	steel
color	black



SKURUP

+ info


quantity	1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
weight [kg]	6
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2
material	steel
color	black



SVIRVEL

+ info


quantity	2
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
weight [kg]	6
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	0,89
material	steel, glass
color	white



LERSTA

+ info


quantity	2
reordering option	yes
wattage [W]	20
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
weight [kg]	4
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1
material	steel
color	white




a: ø 155 mm
b: 1310 mm
c: ø 255 mm

YPPERLIG**+ info**

quantity	2
reordering option	yes
wattage [W]	42
luminous flux [Lm]	500
color temperature [K]	2700
base	LED
weight [kg]	4,7
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	2
material	steel
color	black

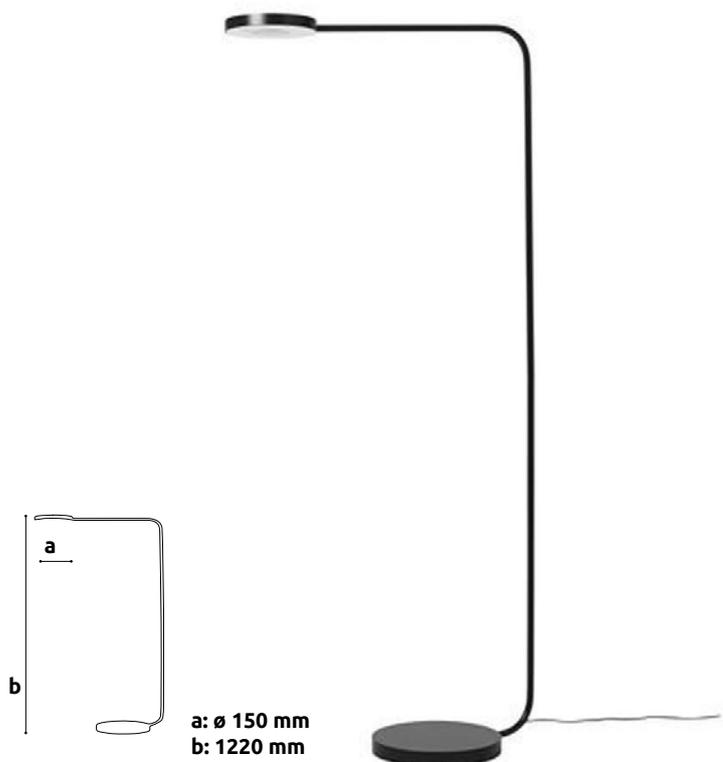**LOFT APP****+ info**

quantity	1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	4,7
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	steel, glass
color	black

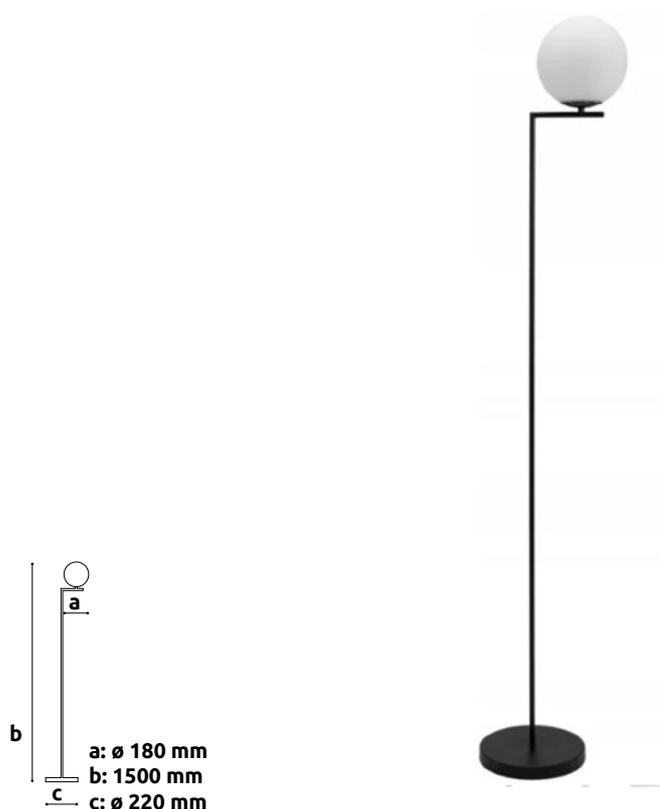


ALDEX**+ info**

quantity	3
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	steel, glass
color	black

**ALDEX INCANA****+ info**

quantity	2
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	steel, glass
color	black

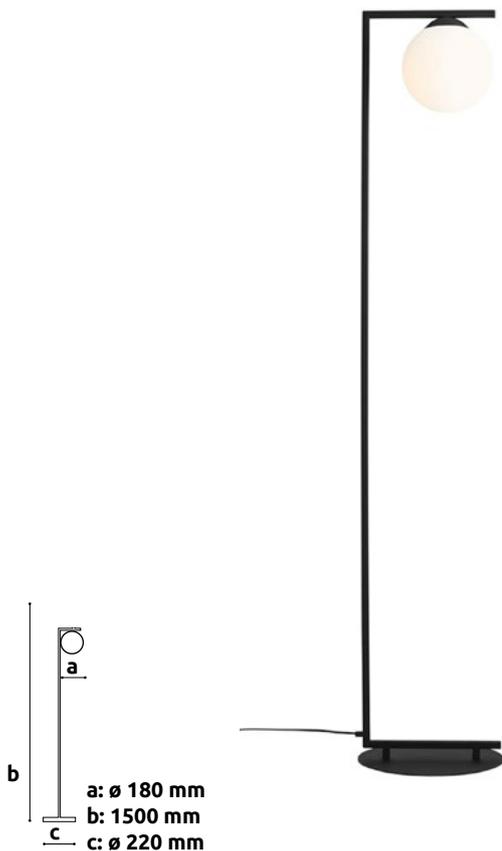



WOODROW

+ info

quantity	1
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	3
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	metal, wood
color	light brown




NAVARRA

+ info

quantity	1
reordering option	no
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	17
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	metal, granite
color	chrome

HEKTAR**+ info**


quantity	17
reordering option	yes
wattage [W]	depending on the light source
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
weight [kg]	6
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	metal, wood
color	dark gray



a: ø 315 mm
b: 1810 mm

ALDEX + info


quantity	5
reordering option	yes
wattage [W]	max 40
luminous flux [Lm]	depending on the light source
color temperature [K]	2700 - 6500
base	E14
weight [kg]	2,8
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	2
material	metal, glass
color	black



a: 320 mm
b: 1640 mm

ALDEX PURE**+ info**


quantity	5
reordering option	yes
wattage [W]	max 10 LED
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E27
weight [kg]	2
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	1,30
material	metal, glass
color	black



a: 240 mm
b: 620 mm

ALDEX PURE**+ info**


quantity	1
reordering option	yes
wattage [W]	max 16
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E14
weight [kg]	0,77
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	1
material	metal, wood
color	black



a: 180 mm
b: 470 mm

LAMPAN

+ info




a: \varnothing 130 mm
b: 290 mm
c: \varnothing 190 mm

quantity	3
reordering option	yes
wattage [W]	40
luminous flux [Lm]	depending on the light source
color temperature [K]	2600 - 6500
base	E14
beam angle [°]	depending on the light source
weight [kg]	0,5
optimal instalation height [m]	floor / table
heat output	low
cable lenght [m]	1,30
material	plastic
color	white

CUMULUS


+ info



a: \varnothing 450 mm


quantity	2
reordering option	yes
wattage [W]	14
luminous flux [Lm]	1521
color temperature [K]	2700 - 6500
base	E27
beam angle [°]	280
weight [kg]	0,15
optimal instalation height [m]	floor
heat output	low
cable lenght [m]	1
material	plastic
color	white

7_ GARLANDS

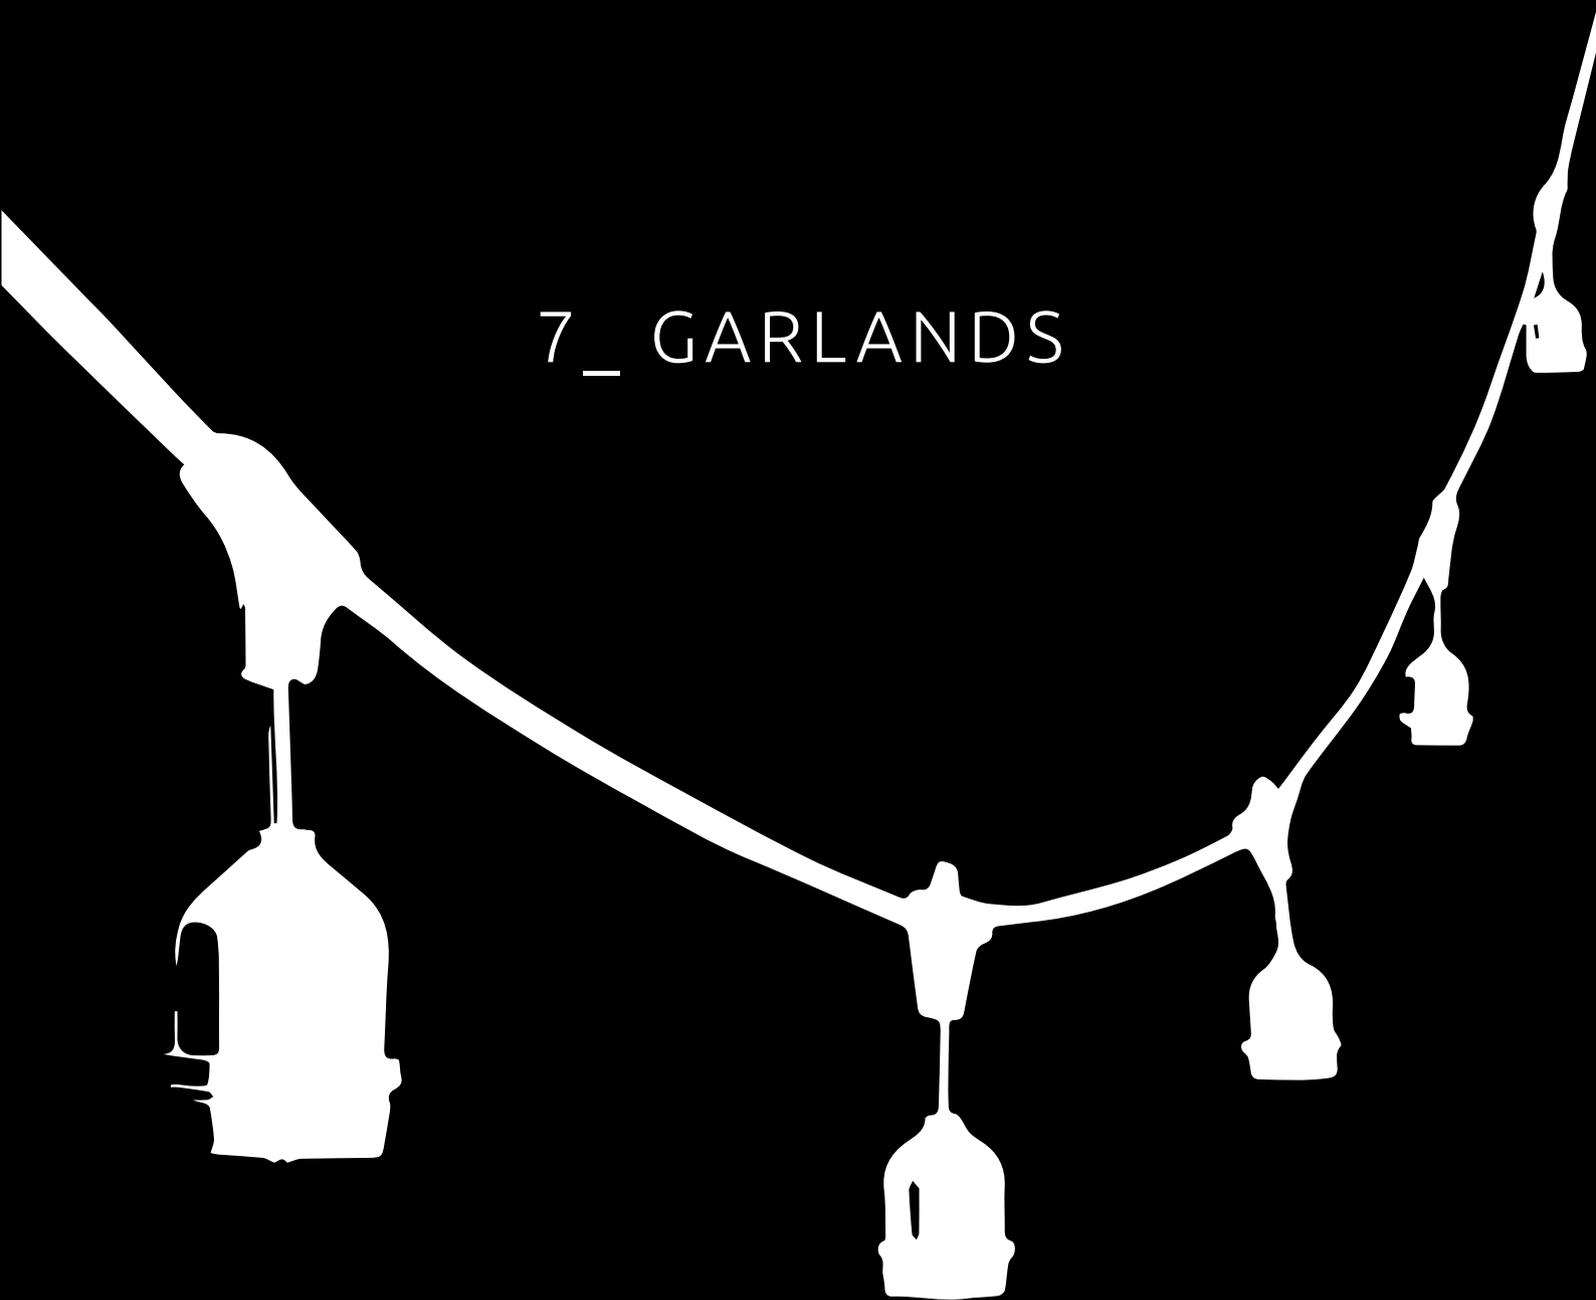


GARDEN + info

quantity	3
reordering option	yes
wattage [W]	2-3
luminous flux [Lm]	200-300
color temperature [K]	2700
base	E27
beam angle [°]	-
weight [kg]	1
optimal instalation height [m]	2,3
max instalation height[m]	3
min instalation height[m]	2
heat output	warm white
cable length [m]	10
material	plastic
color	black

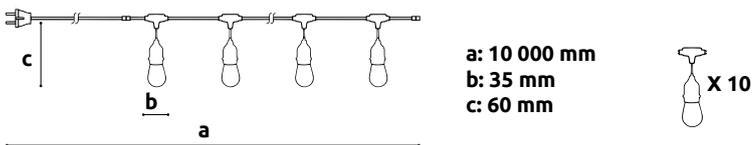

SVARTRA + info


quantity	6
reordering option	yes
wattage [W]	12
luminous flux [Lm]	10
color temperature [K]	2700
base	GU10
beam angle [°]	-
weight [kg]	1,5
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	warm white
cable length [m]	5
material	plastic
color	black

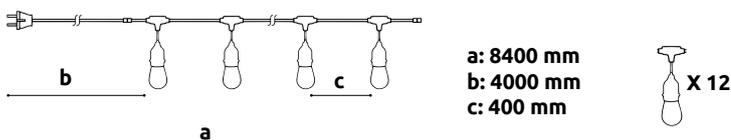




STRING + info

quantity	8
reordering option	yes
wattage [W]	1
luminous flux [Lm]	200
color temperature [K]	2700
base	E27
beam angle [°]	-
weight [kg]	1
optimal instalation height [m]	2-3
max instalation height[m]	3
min instalation height[m]	2
heat output	warm white
cable length [m]	5
material	plastic
color	black

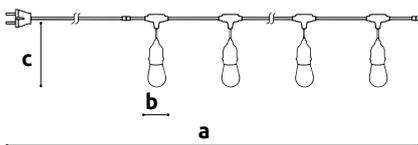

a: 5 000 mm
b: 35 mm
c: 95 mm



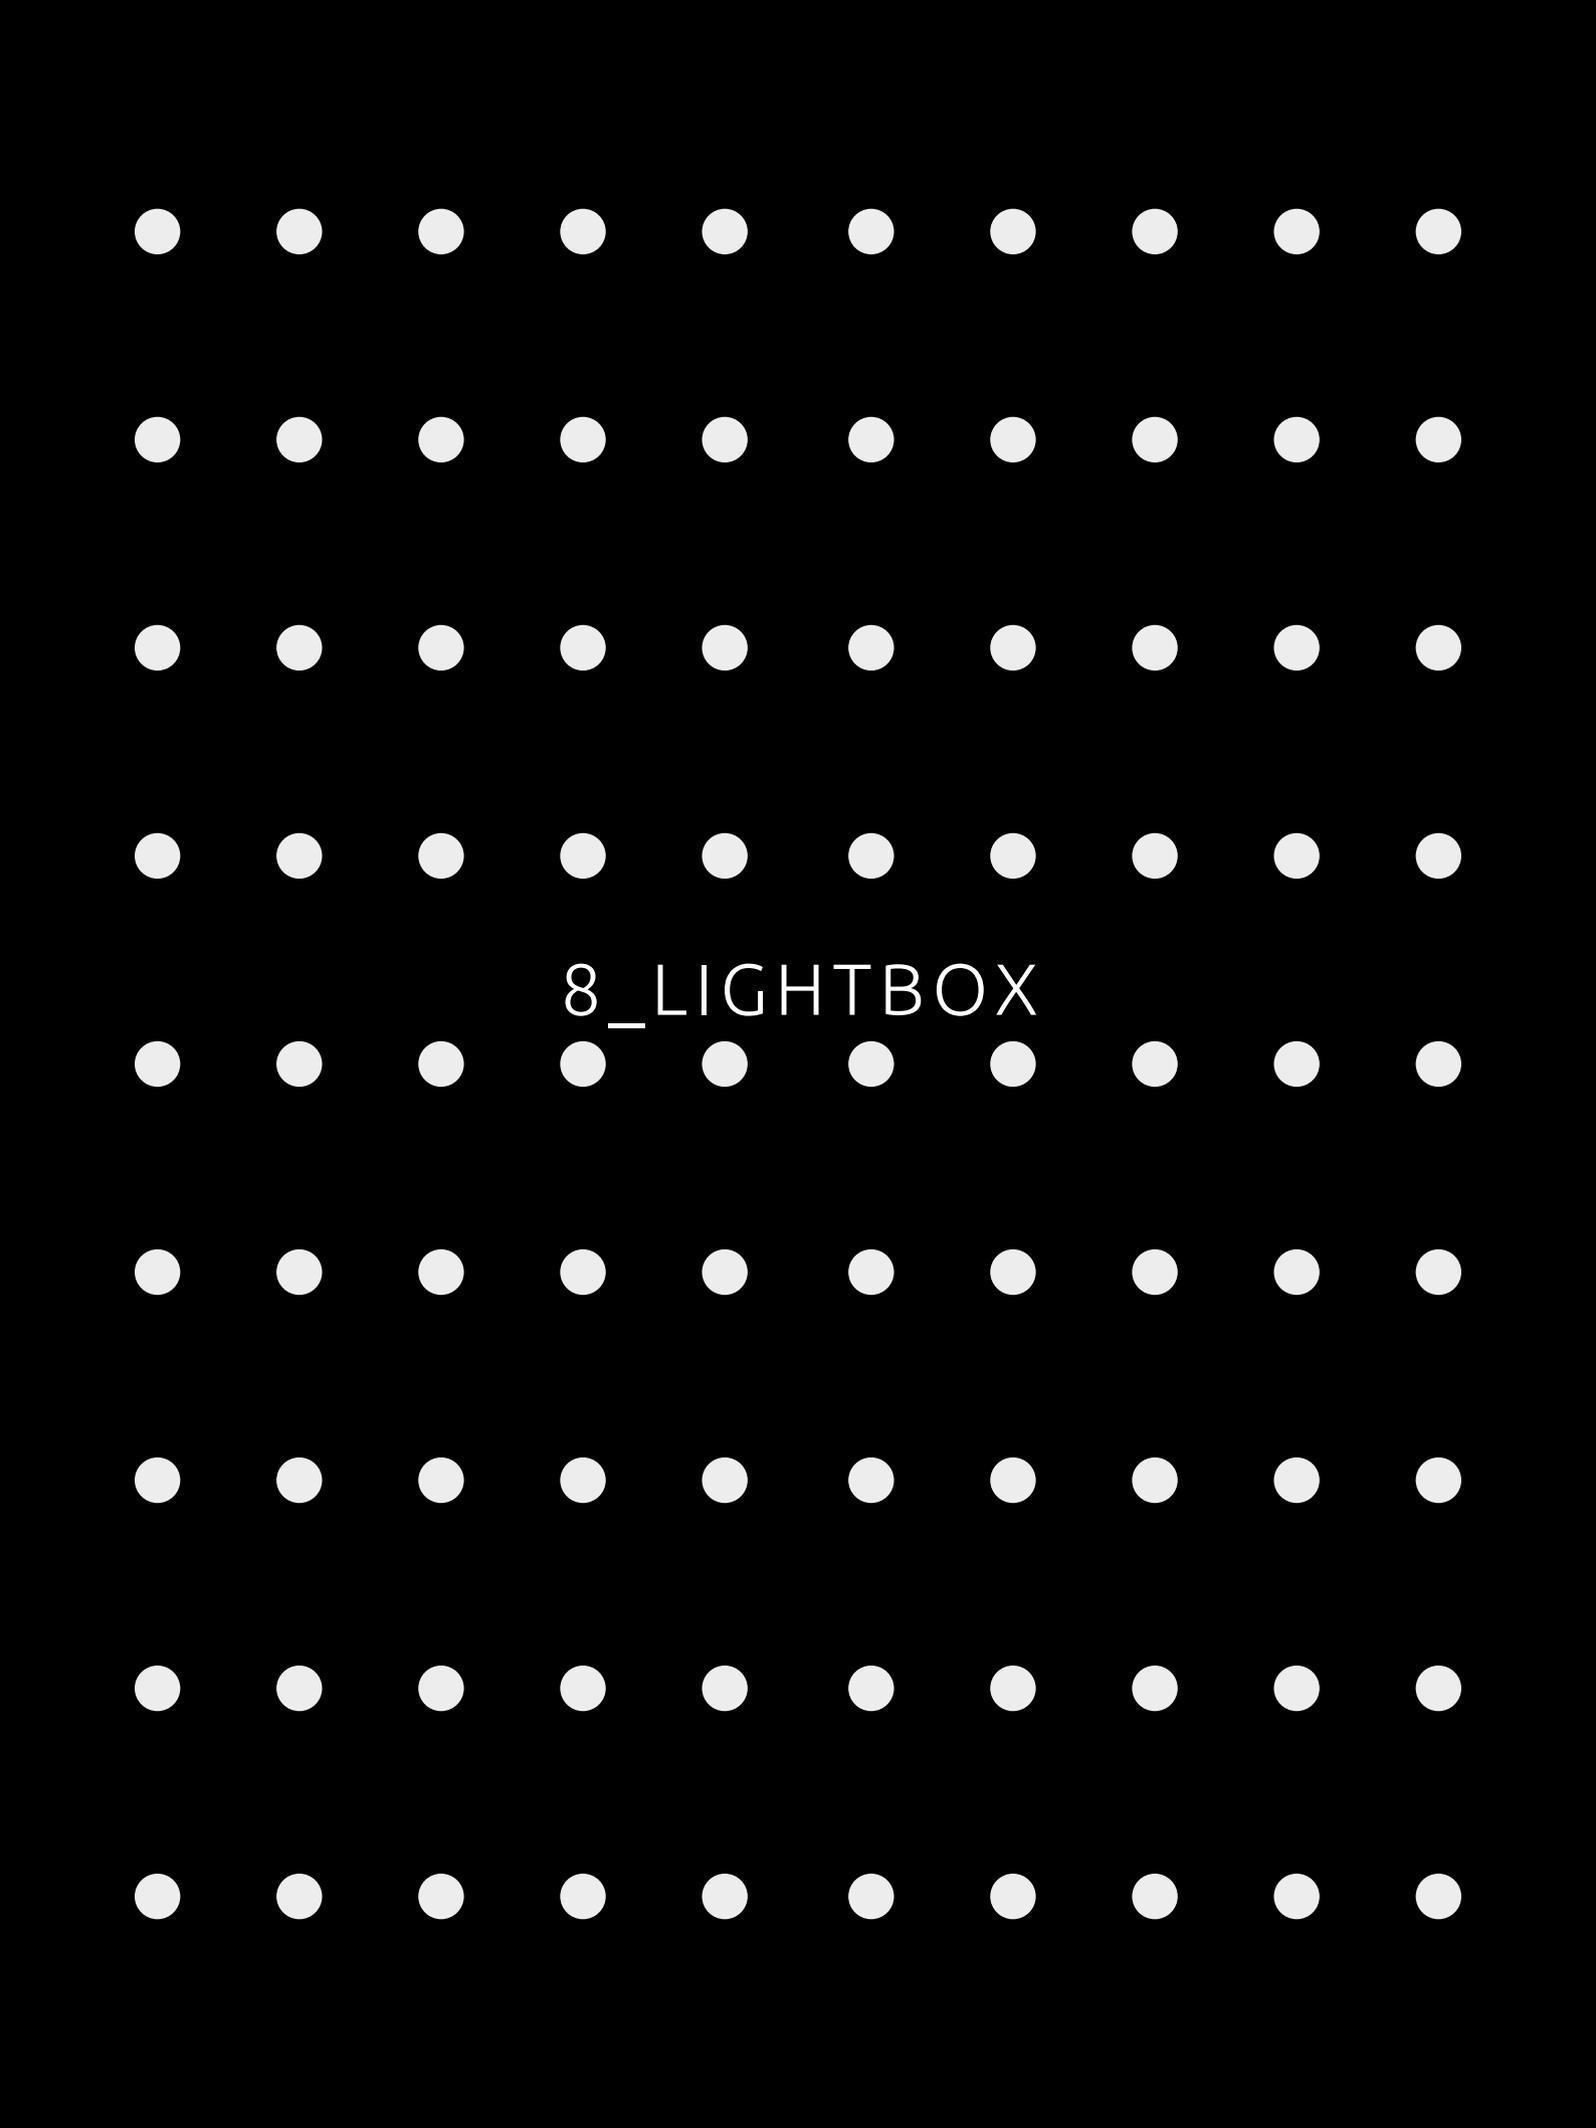

8_LIGHTBOX




LED / Anwis / 2018 / R+T / Stuttgart




EDGE-LIT LIGHTBOXES

EDGE-LIT LIGHTBOXES / IAA / Samsung / 2023 / MUNICH

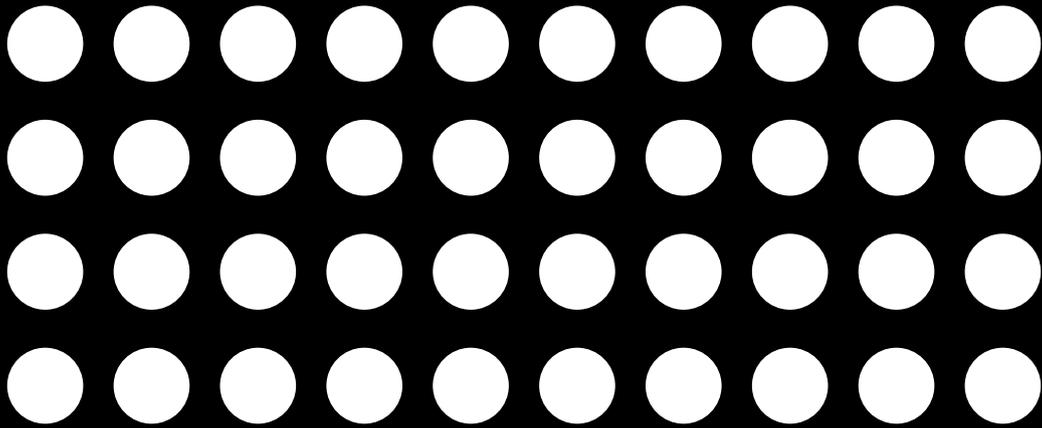

9_ TYPES OF HIGHLIGHTS

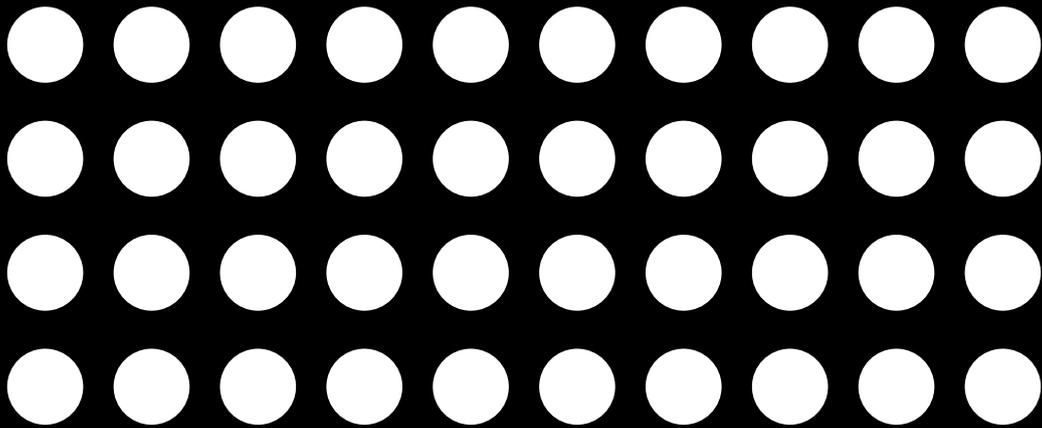



BOX LOGO WITH ILLUMINATED FRONT



3D LOGO WITH ILLUMINATION FROM THE SIDE OF EACH ELEMENT



3D LOGO MADE OF THICK PLEXIGLASS, ILLUMINATED FROM THE FRONT AND SIDE



3D LOGO WITH HALO EFFECT



2D LOGO, MILLED IN THE BOARD, WITH ILLUMINATED FRONT

